State-of-the-Art in Light Rail Alternative Power Supplies

John Swanson & John Smatlak
Interfleet Technology, Inc.
Los Angeles, CA

TRB
13th National Light Rail & Streetcar Conference
APTA

Background

- Conventional OCS preferred power distribution since 1880s
- Complex subject best approached from a *systems* viewpoint
- Three basic types:
  - Ground Level Power Supply (GLPS)
  - Onboard Energy Storage System (OESS)
  - Onboard Power Generation System (OPGS)
- Plus hybridized combinations!

Advantages

- Improved aesthetics
- Reduction in conflicts with other users of the street space
- Potential for infrastructure simplification

Disadvantages

- Vehicle becomes more complicated; weight, space and performance trade-offs
- Onboard Energy Storage- unknown life expectancy of energy storage elements
- Ground Level Power- high cost / proprietary, complicates infrastructure
- Onboard Power Generation- hydrogen technology not mature, expensive, requires fueling

Current Status Worldwide 1

Ten years ago (2005): only one “off wire” system in commercial service (Bordeaux, using GLPS)

Rapidly changing - today there are:

- **8 systems using Ground Level power supply with 5 more under construction**
- **9 systems using Onboard Energy Storage for off-wire with 8 more under construction**

Current Status Worldwide 2

- 4 systems using Onboard Power Generation with one under construction
- Numerous systems using energy storage to achieve energy savings
- More than 27 development prototypes in last ten years!

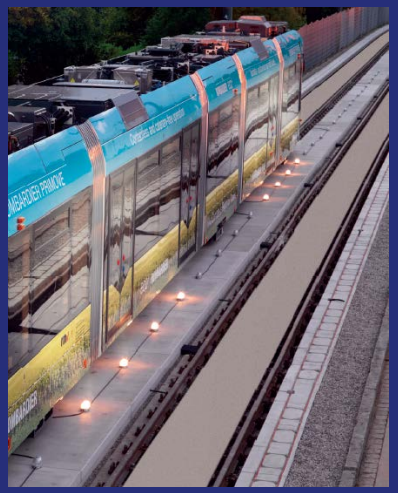

Technology Evolution

- Automotive sector driving development of energy storage devices
- Battery, Super Capacitor, Flywheel and Fuel Cell technologies advanced considerably in last decade
- Light rail / streetcar / tramway vehicles ideal candidate for application of OESS
- Market factors slowing initial progress:
  - Low production quantities
  - Inherent conservatism of railcar market, where 30 year vehicle life is norm

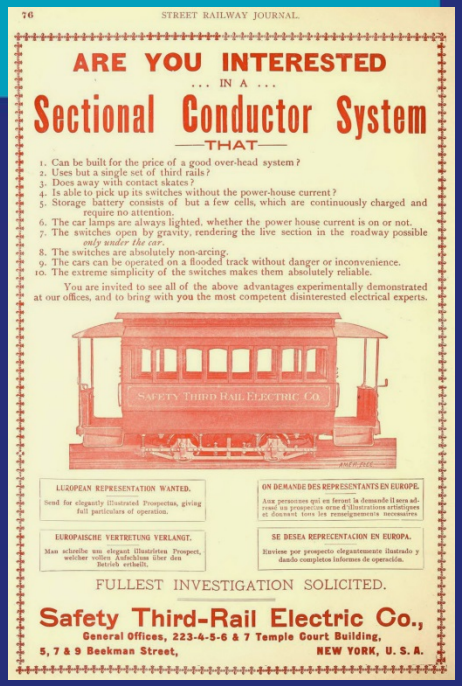
76 STREET RAILWAY JOURNAL.

ARE YOU INTERESTED
... IN A ...
Sectional Conductor System
—THAT—

1. Can be built for the price of a good over-head system?
2. Uses but a single set of third rails?
3. Does away with contact skates?
4. Is able to pick up its switches without the power-house current?
5. Storage battery consists of but a few cells, which are continuously charged and require no attention.
6. The car lamps are always lighted, whether the power house current is on or not.
7. The switches open by gravity, rendering the live section in the roadway possible *only under the car.*
8. The switches are absolutely non-arcing.
9. The cars can be operated on a flooded track without danger or inconvenience.
10. The extreme simplicity of the switches makes them absolutely reliable.

You are invited to see all of the above advantages experimentally demonstrated at our offices, and to bring with you the most competent disinterested electrical experts.

SAFETY THIRD RAIL ELECTRIC CO.

EUROPEAN REPRESENTATION WANTED.
Send for elegantly Illustrated Prospectus, giving full particulars of operation.

ON DEMANDE DES REPRESENTANTS EN EUROPE.

EUROPAISCHE VERTRETUNG VERLANGT.
Man schreibe um elegant Illustrirten Prospect, welcher vollen Aufschluss über den Betrieb erhält.

SE DESEA REPRECENTACION EN EUROPA.
Envíese por prospecto elegantemente ilustrado y dando completos informes de operación.

FULLEST INVESTIGATION SOLICITED.

Safety Third-Rail Electric Co.,
General Offices, 223-4-5-6 & 7 Temple Court Building,
5, 7 & 9 Beekman Street, NEW YORK, U. S. A.

Evolution- Ground Level Power Supply

- Initial approach was to provide a continuous power supply
  - Advantageous where HVAC requirements are high, steep uphill gradients, etc.
  - Downside: complex ground level infrastructure is high cost / proprietary
- Hybridized concept with more onboard energy storage reduces ground level infrastructure (e.g. only at stops and uphill segments)

Evolution- Onboard Energy Storage

- OESS is a non-continuous power source (requires recharging enroute)
- Charging method depends on system design-
  - Charging while under wire (for short off-wire segments)
  - "Charging station" at stops (for longer distances – ground level or overhead pick-up)
- Length of "off-wire" segments increasing on new systems
- Continuing evolution / improvement of energy storage elements

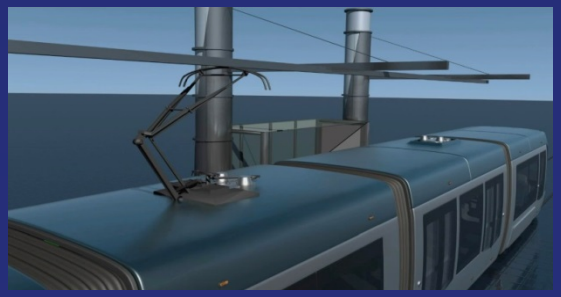

Evolution- Onboard Power Generation

- Slowest to develop due to space impacts, periodic refueling and other trade-offs
- Diesel hybrid tram-train applications
- Major hydrogen fuel cell advances on the horizon, but costs still high

Conclusions 1

- Alternative power supplies entering new phase of development; large number of “early adopter” systems now coming on line – more coming
- Energy storage devices evolving rapidly, driven by automotive sector
- Application remains very project-specific

Conclusions 2

- Commercial issues are significant
  - Little unbiased hard cost / reliability data available
  - Proprietary technology issues remain with GLPS
  - Initial and life-cycle costs still high
  - Are some solutions better suited to alternate project delivery methods?
- OESS has multiple uses – off-wire operation and energy saving (peak shaving)
- Emerging trend is OESS with periodic recharging

Parting Thoughts

- What industry R&D process changes could further speed up / improve development?
- What design and analysis tools are needed to analyze system requirements, optimize design and size vehicle OESS?
- How are standards (or lack thereof) impacting development? What new standards is the industry already working on?
- How are operational impacts being considered? (transit not known for babying equipment)
- What about specifying a vehicle capable of future off-wire upgrade?
- What is the optimal design for charging points and associated equipment?
  - Current collector up/down automation
  - Power supply/distribution to charging points