

IDEA

Innovations Deserving
Exploratory Analysis Programs

RAIL SAFETY

New IDEAS for Rail Safety

Rail Safety IDEA Program Annual Report

JANUARY 2018

The National Academies of
SCIENCES • ENGINEERING • MEDICINE



TRANSPORTATION RESEARCH BOARD

TRANSPORTATION RESEARCH BOARD 2017 EXECUTIVE COMMITTEE*

OFFICERS

CHAIR: **Malcolm Dougherty**, *Director, California Department of Transportation, Sacramento*

VICE CHAIR: **Katherine F. Turnbull**, *Executive Associate Director and Research Scientist, Texas A&M Transportation Institute, College Station*

EXECUTIVE DIRECTOR: **Neil J. Pedersen**, *Transportation Research Board*

MEMBERS

Victoria A. Arroyo, *Executive Director, Georgetown Climate Center; Assistant Dean, Centers and Institutes; and Professor and Director, Environmental Law Program, Georgetown University Law Center, Washington, DC*

Scott E. Bennett, *Director, Arkansas State Highway and Transportation Department, Little Rock*

Jennifer Cohan, *Secretary, Delaware DOT, Dover*

James M. Crites, *Executive Vice President of Operations (retired), Dallas–Fort Worth International Airport, TX*

Nathaniel P. Ford, Sr., *Executive Director–CEO, Jacksonville Transportation Authority, Jacksonville, FL*

A. Stewart Fotheringham, *Professor, School of Geographical Sciences and Urban Planning, Arizona State University, Tempe*

John S. Halikowski, *Director, Arizona DOT, Phoenix*

Susan Hanson, *Distinguished University Professor Emerita, Graduate School of Geography, Clark University, Worcester, MA*

Steve Heminger, *Executive Director, Metropolitan Transportation Commission, Oakland, CA*

Chris T. Hendrickson, *Hamerschlag Professor of Engineering, Carnegie Mellon University, Pittsburgh, PA*

Jeffrey D. Holt, *Managing Director, Power, Energy, and Infrastructure Group, BMO Capital Markets Corporation, New York*

S. Jack Hu, *Vice President for Research and J. Reid and Polly Anderson Professor of Manufacturing, University of Michigan, Ann Arbor*

Roger B. Huff, *President, HGLC, LLC, Farmington Hills, MI*

Geraldine Knatz, *Professor, Sol Price School of Public Policy, Viterbi School of Engineering, University of Southern California, Los Angeles*

Melinda McGrath, *Executive Director, Mississippi DOT, Jackson*

Patrick K. McKenna, *Director, Missouri DOT, Jefferson City*

James P. Redeker, *Commissioner, Connecticut DOT, Newington*

Mark L. Rosenberg, *Executive Director, The Task Force for Global Health, Inc., Decatur, GA*

Daniel Sperling, *Professor of Civil Engineering and Environmental Science and Policy; Director, Institute of Transportation Studies, University of California, Davis*

Gary C. Thomas, *President and Executive Director, Dallas Area Rapid Transit, Dallas, TX*

Pat Thomas, *Senior Vice President of State Government Affairs, United Parcel Service, Washington, DC*

James M. Tien, *Distinguished Professor and Dean Emeritus, College of Engineering, University of Miami, Coral Gables, FL*

Dean H. Wise, *Vice President of Network Strategy, Burlington Northern Santa Fe Railway, Fort Worth, TX*

Charles A. Zelle, *Commissioner, Minnesota DOT, Saint Paul*

EX OFFICIO MEMBERS

Michael Berube, *Deputy Assistant Secretary for Transportation, U.S. Department of Energy*

Mary R. Brooks, *Professor Emerita, Dalhousie University, Halifax, Nova Scotia, Canada, and Chair, TRB Marine Board*

Mark H. Buzby (Rear Admiral, U.S. Navy), *Executive Director, Maritime Administration, U.S. DOT*

Steven Cliff, *Deputy Executive Officer, California Air Resources Board, Sacramento*

Howard R. Elliott, *Administrator, Pipeline and Hazardous Materials Safety Administration, U.S. DOT*

Audrey Farley, *Executive Director, Office of the Assistant Secretary for Research and Technology, U.S. DOT*

LeRoy Gishi, *Chief, Division of Transportation, Bureau of Indian Affairs, U.S. Department of the Interior, Washington, DC*

John T. Gray II, *Senior Vice President, Policy and Economics, Association of American Railroads, Washington, DC*

Heath Hall, *Deputy Administrator, Federal Railroad Administration, U.S. DOT*

Brandye Hendrickson, *Deputy Administrator, Federal Highway Administration, U.S. DOT*

Michael P. Huerta, *Administrator, Federal Aviation Administration, U.S. DOT*

Daphne Y. Jefferson, *Deputy Administrator, Federal Motor Carrier Safety Administration, U.S. DOT*

Heidi King, *Acting Administrator, National Highway Traffic Safety Administration, U.S. DOT*

Bevan B. Kirley, *Research Associate, University of North Carolina Highway Safety Research Center, Chapel Hill, and Chair, TRB Young Members Council*

Wayne Nastri, *Acting Executive Officer, South Coast Air Quality Management District, Diamond Bar, CA*

Craig A. Rutland, *U.S. Air Force Pavement Engineer, U.S. Air Force Civil Engineer Center, Tyndall Air Force Base, FL*

Todd T. Semonite (Lieutenant General, U.S. Army), *Chief of Engineers and Commanding General, U.S. Army Corps of Engineers, Washington, DC*

Karl Simon, *Director, Transportation and Climate Division, U.S. Environmental Protection Agency*

Richard A. White, *Acting President and CEO, American Public Transportation Association, Washington, DC*

K. Jane Williams, *Executive Director, Federal Transit Administration, U.S. DOT*

Frederick G. (Bud) Wright, *Executive Director, American Association of State Highway and Transportation Officials, Washington, DC*

Paul F. Zukunft (Admiral, U.S. Coast Guard), *Commandant, U.S. Coast Guard, U.S. Department of Homeland Security*

* Membership as of October 2017.

NEW IDEAS FOR RAIL SAFETY

Annual Report of the Rail Safety IDEA Program

The Rail Safety IDEA Program is funded by
the Federal Railroad Administration (FRA)
and is managed by the Transportation Research Board.

January 2018

The National Academies of
SCIENCES • ENGINEERING • MEDICINE



TRANSPORTATION RESEARCH BOARD

RAIL SAFETY IDEA PROGRAM PANEL*

Chair

Conrad J. Ruppert, Jr.
University of Illinois
Urbana, Illinois

Members

Tom A. Bartlett
Union Pacific Railroad
Omaha, Nebraska

Melvin Clark
Capital Metropolitan Transportation Authority
Austin, Texas

Michael W. Franke
Amtrak
Chicago, Illinois

Peter W. French
Association of American Railroads
Alexandria, Virginia

Brad Kerchof
Norfolk Southern Railway
Roanoke, Virginia

Martita L. Mullen
Canadian National Railway
Homewood, Illinois

Stephen M. Popkin
Volpe Center
Cambridge, Massachusetts

National Transportation Safety Board Liaison

Robert J. Hall
National Transportation Safety Board
Washington, DC

Federal Railroad Administration Liaison

Tarek Omar
Federal Railroad Administration
Washington, DC

TRB Liaison

Scott Babcock
Senior Program Officer, Rail and Freight
Transportation Research Board

Cooperative Research Programs Staff

Christopher J. Hedges
Director, Cooperative Research Programs

Lori L. Sundstrom
Deputy Director, Cooperative Research Programs and
Manager, National Cooperative Highway Research
Program

Gwen Chisholm Smith
Manager, Transit Cooperative Research Program

Velvet Basemera-Fitzpatrick
Program Officer, Cooperative Research Programs

Deborah Irvin
Program Coordinator, Cooperative Research Programs

The National Academies of
SCIENCES • ENGINEERING • MEDICINE

The **National Academy of Sciences** was established in 1863 by an Act of Congress, signed by President Lincoln, as a private, non-governmental institution to advise the nation on issues related to science and technology. Members are elected by their peers for outstanding contributions to research. Dr. Marcia McNutt is president.

The **National Academy of Engineering** was established in 1964 under the charter of the National Academy of Sciences to bring the practices of engineering to advising the nation. Members are elected by their peers for extraordinary contributions to engineering. Dr. C. D. Mote, Jr., is president.

The **National Academy of Medicine** (formerly the Institute of Medicine) was established in 1970 under the charter of the National Academy of Sciences to advise the nation on medical and health issues. Members are elected by their peers for distinguished contributions to medicine and health. Dr. Victor J. Dzau is president.

The three Academies work together as the **National Academies of Sciences, Engineering, and Medicine** to provide independent, objective analysis and advice to the nation and conduct other activities to solve complex problems and inform public policy decisions. The Academies also encourage education and research, recognize outstanding contributions to knowledge, and increase public understanding in matters of science, engineering, and medicine.

Learn more about the National Academies of Sciences, Engineering, and Medicine at www.national-academies.org.

The **Transportation Research Board** is one of seven major programs of the National Academies of Sciences, Engineering, and Medicine. The mission of the Transportation Research Board is to increase the benefits that transportation contributes to society by providing leadership in transportation innovation and progress through research and information exchange, conducted within a setting that is objective, interdisciplinary, and multimodal. The Board's varied committees, task forces, and panels annually engage about 7,000 engineers, scientists, and other transportation researchers and practitioners from the public and private sectors and academia, all of whom contribute their expertise in the public interest. The program is supported by state transportation departments, federal agencies including the component administrations of the U.S. Department of Transportation, and other organizations and individuals interested in the development of transportation.

TABLE OF CONTENTS

SECTION 1: Completed IDEA Projects

Project	Page
Introduction	1
Safety IDEA 01 Color-Corrected Motor Vehicle Headlight, Rearview Mirror, and Windshield Glare Control	5
Safety IDEA 02 Auto Radio Override Alert System for Highway/Railroad Grade Crossings	6
Safety IDEA 03 Integration of LED Technology with Highway High Mast Illumination Equipment	7
Safety IDEA 04 Safety Effects of Operator Seat Design in Large Commercial Vehicles	8
Safety IDEA 05 Assessment of Driver Safety in Trucks	9
Safety IDEA 06 System to Detect Truck Hunting on Railroads	10
Safety IDEA 07 Driver Alertness Indication System (DAISY)	13
Safety IDEA 08 Cracked Axle Detection on Moving Railcars	14
Safety IDEA 09 Driver Feedback Device for Passive Railroad Grade Crossings	17
Safety IDEA 10 Monitoring Freight Train Position to Improve Emergency Response	19
Safety IDEA 11 Analyzing Near-Misses to Minimize Collisions at Railroad Crossings	20
Safety IDEA 12 Development of an Automatic Diagnostic System for Air Brakes in Trucks	21
Safety IDEA 13 Sensor Integration for Crash Avoidance for Trucks	22
Safety IDEA 14 Onboard Railroad Wheel Monitoring System	23
Safety IDEA 15 Determination of the Longitudinal Stress in Rails	24
Safety IDEA 16 Rail Vehicle Bearing Defect Detection	25
Safety IDEA 17 Non-Contact Driver Drowsiness Detection System	26
Safety IDEA 18 DRIVE-SMART Driver Monitoring and Crash Risk Mitigation System	27
Safety IDEA 19 Increasing Driver's Traffic Awareness around the Truck: Use of 3D Sounds	28
Safety IDEA 20 Material with Improved Absorption of Collision Forces for Railroad Cars	29

Project	Page	
Safety IDEA 22	Laser Cladding of Welds to Improve Railroad Track Safety	32
Safety IDEA 23	Reducing Wheel Climb at Switch Points to Reduce Derailments	35
Safety IDEA 24	High Speed Railroad Bridge Dynamics and Ratings	38
Safety IDEA 25	Dynamic Impact Factors on Existing Long-Span Railroad Bridges	40
Safety IDEA 26	Remote Sensing with Mobile LiDAR and Imaging Sensors for Railroad Bridge Inspections	43
Safety IDEA 27	Field Evaluation of Ballast Fouling Conditions Using Machine Vision	46
Safety IDEA 28	Field Validation of Inspection Gauges for Wheel Climb Safety at Switch Points	50
 SECTION 2: Active IDEA Projects		
Safety Idea 29	Self-Deicing LED Signals for Railroads and Highway Intersections	55
Safety IDEA 30	Development of Ballast Real Time Information System Based on SmartRock	57
Safety IDEA 31	Modeling and Validation of Standards for a Sleeper Compartment on Accessible Passenger Rail Vehicles	59
Safety IDEA 32	Railroad Bridge Inspections for Maintenance and Replacement Prioritization Using Unmanned Aerial Vehicles (UAVs) with Laser Capabilities	63
Safety IDEA 33	Adaptive Prestressing System for Concrete Crossties	65
Safety IDEA 34	Prototype System for Managing and Analyzing Enterprise Rail Transport Risks for Hazmat	67
Safety IDEA 35	Non-Contact Deflection Monitoring System for Timber Railroad Bridges	69

INTRODUCTION

This annual report presents a summary of progress on investigations conducted as part of the Rail Safety Innovations Deserving Exploratory Analysis (Rail Safety IDEA) program sponsored by the Federal Railroad Administration. The program is managed by the Transportation Research Board, part of the National Academies of Sciences, Engineering, and Medicine, and technical oversight is provided by the Transportation Safety IDEA Program Committee.

Rail Safety IDEA is one of three IDEA programs managed by the Transportation Research Board (TRB) to improve railroad safety and performance. The Federal Railroad Administration is interested in proposals that will improve safety and performance in railroad systems, including in the following areas: security, environmental impact; human factors; rolling stock and components; track and structures; track/train interaction; grade crossings; hazardous materials transportation; train occupant protection; trespass prevention; signaling and train control systems; and employee safety.

The other IDEA programs managed by TRB:

- Highway IDEA, which focuses on technologies, methods, and processes for application to highway systems in broad technical areas such as highway design and construction, materials, operations, and maintenance (part of the National Cooperative Highway Research Program); and
- Transit IDEA, which focuses on products and results of interest to transit industry as part of the Transit Cooperative Research Program.

All of the IDEA programs are integrated to support advances in highway, transit, safety, rail, and intermodal systems.

The IDEA programs can receive proposals from any individual, including entrepreneurs, small and large businesses, and institutions. The program provides funding to investigate new and unproven concepts or to evaluate novel applications of technologies that have been tried, tested, or used for highway, transit, high-speed rail, or intermodal systems practice.

The selection of each IDEA investigation is made by consensus recommendations from the Rail Safety IDEA Program Committee, which comprises national experts in railroad research and practice, and whose members are listed at the beginning of this report. A technical expert is selected from outside TRB to serve as a voluntary advisor for each IDEA project. The technical project advisor provides continuing advice and counsel on the IDEA investigation to the investigator and the IDEA program office. To begin the product transfer process from the initiation of each IDEA project, a regional panel of experts is nominated to work with the investigator on product development and transfer to railroad practice. The products emerging from the Rail Safety IDEA program support a range of innovative developments for promising but unproven innovations to advance railroad practice. Such proposals can apply to any type of railroad, including high-speed railroads, intercity passenger railroads, or freight railroads.

Section 1 of this report presents short descriptions of projects completed before the 2018 program year. The products and results from these projects have been applied or are available for further investigation for application to railroad practice. The product status is described under each project. Because of limitations on IDEA resources, not all IDEA concepts that prove feasible can be accommodated for follow-up funding by the Rail Safety IDEA program for product transfer. Section 2 presents reports of investigations on projects active or completed during the 2017 program year; several projects in this section are in the initial stages of investigation.

In selecting new concepts, the IDEA program balances the quest for new products with an understanding of the barriers each product may face for application to practice. Assessing the level of readiness for deployment of IDEA products and results is important in deciding on follow-up actions that are necessary to transfer the IDEA product to practice. The annual report is intended to provide railroad practitioners with the background on each IDEA investigation and product in development so that a dialogue on its potential transfer can take place between the investigator and railroad practitioners.

The IDEA program welcomes your comments, suggestions, or recommendations on Rail Safety IDEA projects, products, and results presented in this report. Please forward them to The Rail Safety IDEA Program (attention: Velvet Basemera-Fitzpatrick), Transportation Research Board, 500 Fifth St. NW, Washington, DC 20001, Email: vfitzpatrick@nas.edu.

General information on the IDEA programs, including how to apply for funding, may be found on the TRB website at <http://www.trb.org/IDEAProgram/IDEAProgram.aspx>.

SECTION 1
COMPLETED IDEA PROJECTS

Color-Corrected Motor Vehicle Headlight, Rearview Mirror, and Windshield Glare Control

Safety IDEA Project 01

Research Agency: Dr. Gordon Harris
Principal Investigators: Dr. Gordon Harris and Daniel Karpen
Completed: February 15, 2005 - - Project Completed
IDEA Contract Amount \$90,000

The purpose of this project was to use clinical optometric research and field trials to investigate the reduction in glare and improvement in night visibility from the use of Neodymium Oxide doped headlights, rear view mirrors, and windshields.

Neodymium Oxide, as a component of glass, selectively filters out yellow light. Neodymium Oxide can be incorporated into the glass of the headlight lamp, rear view mirror, and windshield. When yellow light is filtered out of the spectrum, the color contrast of other colors is improved. Improvement in contrast can permit a motor vehicle driver to better discriminate viewed objects at night. Filtering yellow light from headlights reduces glare and should lessen eyestrain currently resulting from light emitted from conventional headlights of oncoming vehicles at night.

Neutral density filters and neodymium windshield glass were received and used in trial tests. Samples of windshield glass were received from windshield manufacturers.

Thirty subjects were tested in the offices of Dr. Gordon Harris, who is a doctor of optometry. Nine different tests were performed in the office. Field trials were conducted, in which 30 subjects carried out tests drives at night. The office test involved specific optometric tasks done in a clinical optometric setting, and the field trials involved road testing of standard headlights and Neodymium Oxide doped headlights.

The Draft Final Report was reviewed by members of the Expert Review Panel for this project and by the Safety IDEA committee. The revised Final Report for this project, addressing comments from these committee members' reviews, was submitted in February 2005. This project is completed.

The project investigators presented a Society of Automotive Engineers (SAE) paper on this project at the 2005 SAE World Congress in Detroit in April 2005.

The invention for headlights, which was tested in this Safety IDEA project, was subsequently commercialized and licensed to Federal Mogul Corporation following this project. That company sold over 1,000,000 Neodymium doped vehicle headlights under the trade name, True-View, in their Wagner Lightning Products division.

Auto Radio Override Alert System for Highway/Railroad Grade Crossings

Safety IDEA Project 02

Research Agency: Midland Associates, Inc.
Principal Investigator: Douglas Maxwell
Completed: November 22, 2005 - - Project Completed
IDEA Contract Amount: \$79,000

The purpose of this project was to test the proposed Auto Radio Override Alert System, which was designed to enable a train to override active AM and FM radios in motor vehicles in the immediate area of a highway/railroad grade crossing, to warn the motor vehicle drivers of the approach of the train. No modification or new device in the motor vehicle would be needed.

The concept of overriding the broadcast program was validated in earlier tests with the transmitter located on an emergency vehicle and transmitting only on certain FM frequencies. The objective of this investigation was to validate the design and application, with the transmitter located on a locomotive or at a highway/railroad grade crossing in a rural area, and transmitting the emergency message across the AM and FM broadcast bands.

The field tests, which would have been part of Stage 3 of this three-stage project, continued to be delayed as Midland Associates waited to get an experimental test license approved by the Federal Communications Commission (FCC). Since Midland Associates did not get a license from the FCC to allow them to do the field tests, following continued efforts by Midland Associates, this project was ended, as recommended by the Midland Associates' Principal Investigator.

The Principal Investigator prepared a project Final Report on the part of this project that was carried out, including what was learned in this effort. Lessons learned from this effort should be useful if there is any future consideration of a similar device. The Principal Investigator submitted the Final Report in November 2005. This project is completed.

Integration of LED Technology with Highway High Mast Illumination Equipment

Safety IDEA Project 03

Research Agency: Focus Illumination Limited

Principal Investigator: Phillip DeSantis

This proposal was withdrawn by the proposer. The proposer found technical difficulties involving the power supplies, which they felt would make the project unfeasible at this time. The Principal Investigator became ill also. This project would have been considered for joint funding by the NCHRP IDEA program and the Safety IDEA program if it had not been withdrawn.

Safety Effects of Operator Seat Design in Large Commercial Vehicles

Safety IDEA Project 04

Research Agency: Virginia Tech
Principal Investigator: Dr. Mehdi Ahmadian
Completed: June 1, 2005 - - Project Completed
IDEA Contract Amount: \$89,650

This project investigated the effect of seat cushion design in large commercial trucks on driver fatigue and vehicle safety. The project included field tests and evaluations, and development of guidelines for improving truck seat design to address driver fatigue.

This effort was motivated by the findings by the U.S. Department of Transportation and others that fatigue is a major factor in commercial vehicle accidents. The issues related to human fatigue (the long-term physical effect) are quite different and far more complex than those related to comfort (the short-term effect on human body) that have been studied extensively in the past.

The project validated the findings of Virginia Tech's laboratory studies, by investigators conducting a series of field tests and evaluations using class 8 trucks. This included the tests on a semi-truck (i.e., a Volvo VN Series class 8 truck) at the Advanced Vehicle Dynamics Laboratory of Virginia Tech. The tests, which included both subjective and objective evaluations, were aimed at better understanding the relationship between seat design and driver fatigue and vehicle safety, in terms of driver alertness and attentiveness, reduced rates of accidents, frequency of near misses, and ability to perform the tasks that are commonly required during driving.

The Draft Final Report was reviewed by the Expert Review Panel for this project and by the Safety IDEA committee. The revised Final Report for this project, addressing comments from committee members' reviews, was submitted in June 2005. This project is completed.

The results of the research have been implemented. The air-inflated seat cushions that were developed and tested in this Safety IDEA project are available to the trucking industry. The two companies that have sold them are ROHO (seat cushion manufacturing company) and Volvo Trucks, North America, who were both participating industrial partners and had been involved in testing in this Safety IDEA project. Follow-on activity by the project investigators, after this project, included working with these industrial partners to collect additional test data in the field to further validate the methods that had been developed under this project. There was a substantial amount of participation in follow-on activity on the part of the industrial partners, working with the investigators from Virginia Tech.

Assessment of Driver Safety in Trucks

Safety IDEA Project 05

Research Agency: Waypoint Research Inc.
Principal Investigator: Dr. Michael Cantor
Completed: October 5, 2006 - - Project Completed
IDEA Contract Amount: \$89,260

This project tested “WayPoint,” a web-based, non-verbal cognitive assessment tool, which has been shown to identify people who are at risk to drive various kinds of commercial motor vehicles. Waypoint Research Inc. (WRI) developed norms for drivers of long haul and local trucks. Test data was compared with the following criterion measures: preventable crashes, crash severity, and performance on a driver training range. WRI also replicated previous research showing a relationship between sleepiness and “WayPoint” score.

The test assessed the match between a driver’s channel capacity (speed of information processing) and his or her “situational awareness” (how aware the person is of the visual field). Potential applications for trucking companies that operate fleets of heavy trucks include driver selection, identification of drivers who would benefit most from training, a diagnostic for the kind of training that would be most effective and for feedback to the driver.

More than 1,200 truck drivers from seven different truck fleet operators took the “WayPoint” test on the web in this project. The research was done in cooperation with seven trucking companies.

The Draft Final Report was reviewed by the Safety IDEA committee and also by expert reviewers for this project. The revised Final Report for this project, addressing comments from committee members’ reviews, was submitted in October 2006. This project is completed.

System to Detect Truck Hunting on Railroads

Safety IDEA Project 06

Research Agency: Transportation Technology Center, Inc. (TTCI)

Principal Investigator: Richard Morgan

Completed: February 28, 2006 - - Project Completed

IDEA Contract Amount: \$80,000

This project investigated the viability of using an array of non-contact, displacement measurement sensors (DMS) to detect railroad car truck hunting. The system is intended to provide information for monitoring the dynamic lateral stability performance of railroad car trucks passing a wayside installation. (See Figure 1.)

The system was developed using two stages: a laboratory stage (Stage 1) and on-track testing (Stage 2). During Stage 1, fiber optic DMS were selected and tested for the performance characteristics necessary for truck hunting detection; however, test results indicated that the selected sensors were unable to perform well in this application. The expert review panel recommended that an alternative DMS-based truck hunting detection prototype be evaluated in Stage 2 of the project. This prototype, developed by an Australian company known as Lynxrail, uses an array of paired inductive proximity DMS instead of fiber optic DMS.

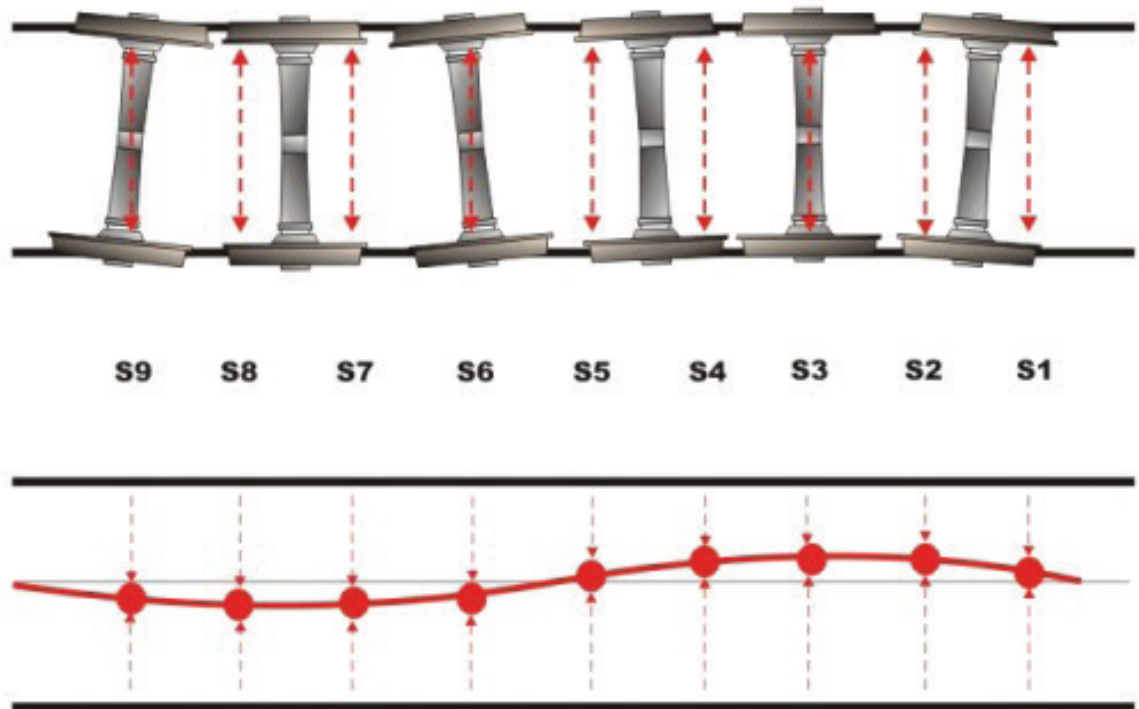


Figure 1: A wheelset's path captured by a multiple sensor array

At the time of the completion of Stage 1, there was an opportunity for an evaluation at a revenue service site for Stage 2. In July of 2004, the Norfolk Southern Corporation (NS), in conjunction with the Federal Railroad Administration (FRA), conducted a comparative test of truck hunting detection systems as part of their separate ongoing cooperative agreement for wayside component inspection demonstrations. TTCI was allowed to participate in the evaluation using the Lynxrail prototype in Flat Rock, Kentucky. (See Figure 2.)

The Stage 2 test results indicated that the Lynxrail prototype provided estimates of speed and Root-Mean-Square (RMS) of carbody end lateral accelerations that were highly positively correlated with those measured by onboard instrumentation. These results validated the concept of truck hunting detection via an array of paired DMS; however, variability was observed in the Lynxrail prototype estimates of RMS lateral accelerations, especially at higher vehicle operating speeds.

Changes in wheel/rail interaction and in truck performance make truck hunting a very dangerous event with the potential for derailment as a possible outcome. It is important to identify rail cars in service that exceed acceptable levels of truck hunting. Fulfilling this need through proper utilization of wayside, DMS-based truck hunting detection technology offers the obvious opportunity to curtail hunting related derailments, but it also provides possibilities to



Figure 2: Norfolk Southern test site for wayside detectors in Flat Rock, Kentucky

mitigate: (i) accelerated degradation of car suspension systems and wheel profiles, (ii) track damage, (iii) as well as damage to the payload of the car. Additional benefits may result from fact that the system is designed to be modular and transportable.

The prototype arrays of paired inductive proximity DMS performed adequately when compared with onboard data, and thus final development of the system should be encouraged. Several prototype enhancements needed to better support the operations of the North American railroad industry include: (i) incorporation of Automatic Equipment Identification (AEI) interface capabilities, (ii) ruggedization of track-mounted system components, (iii) protection of the system so it can successfully function in all North American climates, and (iv) possible improvements to the algorithms used to estimate RMS of carbody end lateral accelerations.

The Draft Final Report was reviewed by the Safety IDEA committee and also by the Expert Review Panel for this project. The revised Final Report for this project, addressing comments from committee members' reviews, was submitted in February 2006. This project is completed

Driver Alertness Indication System (DAISY)

Safety IDEA Project 07

Research Agency: Sphericon Ltd.
Principal Investigator: Dr. Dan Omry
Completed: December 4, 2006 - - Project Completed
IDEA Contract Amount: \$78,000

This project tested the innovative concept for detecting driver inattentiveness that was developed by Sphericon. This concept is based on steering system dynamics: the separation of driver actions from the effects of the external world on the vehicle's lateral motion and using that relationship to evaluate driver alertness. When driver action is weighed against the effect of disturbances (bumps and road imperfections, wind gusts, etc.) on the lateral motion of the vehicle, a good measure as to the alertness or attentiveness of the driver can be obtained.

This project included the development and construction of a hybrid (hardware-in-the-loop) simulator which integrated a real steering system with a computerized simulator and with an elaborate set of sensors and data acquisition system. The use of such a simulator allowed experiments with inattentive drivers in the safe environment of the laboratory.

The last stage of the project included the enhancement of the DAISY algorithms. This involved conducting driving tests in the hybrid simulator with drivers at different stages of alertness and analysis.

Twenty-four tests were conducted of which eight were discarded due to various issues with the use of the new simulator system or with the test subjects. Analyses of the data were performed and the algorithms were enhanced to conform to the selected measurement approach. The results obtained from the tests were translated into an alertness indicator which was then compared with an index produced by subjective judgment: two investigators observed independently the recorded video of the test subjects and graded their level of alertness.

The comparative analyses conducted resulted in promising results. Although the analysis was qualitative in nature, the similarity of the pattern of the alertness index generated by DAISY to that produced by the subjective judgment method indicated the validity of the principles that govern the operation of DAISY.

The Draft Final Report was reviewed by the Safety IDEA committee and by the Expert Review Panel for this project. The revised Final Report for this project, addressing comments from these committee members' reviews, was submitted in December 2006. This project is completed.

Cracked Axle Detection on Moving Railcars

Safety IDEA Project 08

Research Agency: Transportation Technology Center, Inc. (TTCI)

Principal Investigator: Richard Morgan

Completed: August 31, 2006 - - Project Completed

IDEA Contract Amount: \$50,000

This project examined a method for remotely detecting cracks in moving railroad car axles. The objective of this project was to determine if Laser Air-coupled Hybrid Ultrasonic Technique (LAHUT) inspection methodologies developed for detecting flaws and defects in rail and railroad car wheels could be applied to wayside detection of cracks in freight car axles. Figure 1 shows a broken railroad axle that occurred in the FAST Track at TTCI.

The efforts focused on adapting LAHUT inspection methodologies for remotely detecting cracks in axles of test railcar wheelsets. This project includes developing procedures required to apply the LAHUT to detect axle cracks, followed by designing and conducting a proof-of-concept (POC) demonstration. Potential benefits include improved safety of railroad operations by removing cracked railcar axles from service prior to failure.

The developmental approach and testing of the cracked axle detection system included two stages. Stage 1 involved completing an extensive literature review of laser-based ultrasonic inspection methods. Stage 2 involved the planning and conducting of a POC demonstration in a dynamic environment.

Stage 1 activities included laboratory experiments using a high-energy pulsed laser to introduce ultrasonic wave modes into the axle body and an air-coupled transducer to monitor



Figure 1: Broken railroad axle

the ultrasonic waves. Figure 2 is a diagram of the lab set up used during Stage 1 testing. Data analysis techniques used during this stage of development monitored the ultrasonic signals for the arrival of both expected and unexpected waveforms.

Stage 2 activities focused on determining if the laboratory results could be used to construct a system for dynamic detection of surface breaking fatigue cracks in the axle body.

Figure 3 displays the components and Stage 2 test set-up used during the POC demonstration.

A single laser pulse was output by the high-energy laser. Some 206 axle passes were completed with six test axles containing defects. Forty-one passes were completed with axles containing no defects. At the conclusion of the POC demonstration, 88 percent of the defects were detected with only one false positive in 41 opportunities.

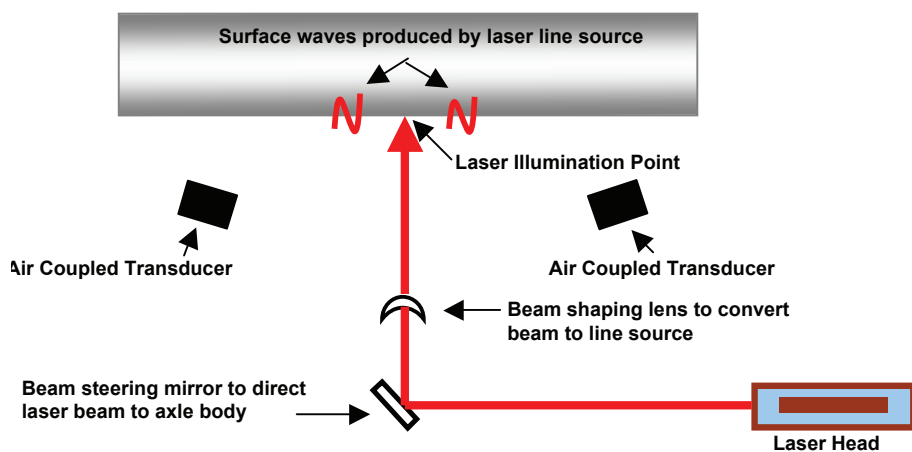


Figure 2: Axle inspection laboratory setup

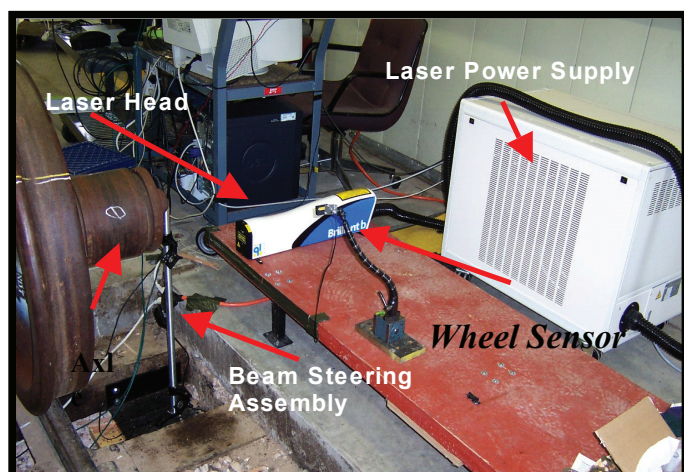


Figure 3: Proof of concept demonstration test setup

The results of the POC demonstration performed by TTCI clearly support the feasibility of using laser-based ultrasonic inspection to detect flaws in the axle body, both statically and dynamically. These results strongly suggest that this inspection technique could form the basis of a wayside system to detect cracks in the axle body. Further, it may be possible to extend the technique to find flaws in other axle segments (wheel seat and journal bearing area).

The Draft Final Report was reviewed by the Safety IDEA committee and also by the Expert Review Panel for this project. The revised Final Report for this project, addressing comments from committee members' reviews, was submitted in August 2006. This project is completed.

TTCI has continued development on an in-track system that will detect defects in both the axle body and wheel seat areas. Plans by TTCI after completion of this Safety IDEA project include system installation and testing at TTCI.

Driver Feedback Device for Passive Railroad Grade Crossings

Safety IDEA Project 09

Research Agency: Westat
Principal Investigator: Dr. Neil Lerner
Completed: December 21, 2006 - - Project Completed
IDEA Contract Amount: \$85,000

This project developed a low-cost, portable device to provide drivers with explicit feedback about the safety of their behavior at passive highway-railroad grade crossings. Passive grade crossings have no gates, barriers, or lights and are typically located in rural areas with relatively low traffic volumes and relatively low train volumes. At passive grade crossings, drivers are responsible for slowing sufficiently and searching for trains so that they can stop in time if a train is approaching.

Past research has indicated that many drivers do not behave properly at passive crossings. Any countermeasures to improve the situation at passive crossings should be low-cost. The concept in this project is to design an intelligent device that can determine whether drivers are exceeding safe approach speeds, given the sight distance, local train speeds, site geometry, and vehicle characteristics. Because the device would be portable, it could be used at multiple sites, in the same way speed trailers are used, thus making the cost per site low. It could be used for periodic or spot application at multiple passive grade crossings in a region or corridor.

Driver behavior research suggests that one reason for poor crossing behavior for some drivers is “benign feedback.” Drivers may approach crossings too fast to allow effective visual search and safe stopping, however because the actual arrival of a train at about the same time is a relatively rare event, the experience is “benign” (no consequence) despite their errors. Thus they essentially think that what they did was OK. The driver feedback device under development here is designed to provide realistic, individualized feedback to inform drivers of unsafe behavior at grade crossings and teach them what is more appropriate. This driver feedback system is not intended to be a traffic control device that controls drivers’ actions on their approach to a crossing. Rather it is an instructive system that informs the driver about what they did. It is meant to influence drivers in a given area even after the portable system has been removed for use elsewhere.

Figure 1 shows a conceptual example of the type of feedback provided to motorists after they encounter the crossing. This illustration is “conceptual” in that the message shown is idealized, but not really practical, given the on-road requirements for legibility distance, sign reading time, display size, and the capabilities of conventional portable changeable message signs. One of the tasks of the project was to devise an effective message and format that is both practical and well-understood.

Stage 1 of this two-stage project accomplished the following:

- Review of literature and technologies regarding state-of-the-art in traffic feedback systems
- Evaluation of road user requirements for message perception, comprehension, and acceptance (based on driver focus groups as well as literature and analyses)
- Determination of formal functional requirements and performance specifications.

The functional specifications developed in Stage 1 provide the basis for the engineering design in Stage 2 of this project. Functional specifications were derived for vehicle sensing, train sensing, environmental sensing, driver displays, user interface, rail crossing traffic data recording and storage, and other general device requirements.

In Stage 2, the project investigators designed and constructed a prototype system meeting the functional requirements. The system was then evaluated under systematic conditions in a test-bed setting.

There are close to 90,000 public passive highway-rail grade crossings in the U.S. The low vehicular and/or train traffic levels at passive grade crossings, or other factors, make it impractical to install and maintain upgraded levels of protection (e.g. gates or grade separation) at all of those crossings. The portable nature of the proposed device could provide a practical way to address safety at such locations. Feedback at any one location should also generalize in terms of improved driver behavior at other grade crossings. Thus there would be potential for widespread application and reduction of crashes.

The effectiveness of the device (measured in terms of improved driver behavior, during device operation and subsequent to device removal) would need to be verified and quantified through field evaluation at representative sites after this project.

The Draft Final Report was reviewed by the Safety IDEA committee and also by the Expert Review Panel for this project. The revised Final Report for this project, addressing comments from committee members' reviews, was submitted in December 2006. This project is completed.



Figure 1: Conceptual example of a driver feedback display for passive grade crossings

Monitoring Freight Train Position to Improve Emergency Response

Safety IDEA Project 10

Research Agency: Union Switch & Signal Inc.
Principal Investigator: Frank Boyle and Michael Pasternak
Completed: May 5, 2008 - - Project Completed
IDEA Contract Amount: \$71,000

The purpose of this project was to determine train location so that local authorities can respond more rapidly and effectively to emergencies. Web-based communication/information technologies were applied to the interaction and interfacing of local emergency response systems and freight trains. The application utilized GPS information to accurately display the positions of trains in real or near real time. A Geographical Information System (GIS) monitor for displaying train position is an improvement over existing displays, which present straight-line track diagrams.

This project included the technical development required to adapt the web-based information technology to handle railroad GIS data and concomitant displays. The project included testing the resulting "Civil Overviews" prototype display system. This project used CSX railroad track infrastructure data for analysis.

The Draft Final Report was reviewed by the Safety IDEA committee and also by expert reviewers for this project. The revised Final Report for this project, addressing comments from reviews, was submitted in May 2008. This project is completed.

Analyzing Near-Misses to Minimize Collisions at Railroad Crossings

Safety IDEA Project 11

Research Agency: University of California, Berkeley

Principal Investigator: Dr. Theodore E. Cohn

This proposal was withdrawn by the proposer. This was because they felt that it would be impossible to perform the work due to a number of technical issues, and because of the death of the Principal Investigator before the project could start.

Development of an Automatic Diagnostic System for Air Brakes in Trucks

Safety IDEA Project 12

Research Agency: Texas Transportation Institute
Texas A&M University
Principal Investigator: Dr. Darbha Swaroop
Completed: December 31, 2008 - - Project Completed
IDEA Contract Amount: \$80,000

This project developed a prototype system to automatically detect leaks in air brakes in trucks. This was an on-board diagnostic system. It estimated the push rod stroke, in real-time, from measurements of pressure in the brake chambers and supply reservoirs.

A leak in the air brake system is detected by making "full" brake applications (i.e. a brake application where the steady state pressure in the brake chamber is nearly equal to the supply pressure) and comparing the steady state pressure measurements in the brake chambers with the supply pressure. The presence of a leak in the air brake system and the push rod stroke being greater than the re-adjustment limit, increases the lag in the response of the system to a pedal input by the driver, thus making the brake system response more "sluggish". These factors will also lead to a decrease in the torque available for braking. A leak also increases the work load on the compressor and related components, thus leading to faster wear if undetected.

A diagnostic system was developed in this project that could be used by truck fleet owners to perform regular maintenance inspections and by road-side inspection teams as a fast and reliable tool in their enforcement inspections.

The Draft Final Report was reviewed by the Safety IDEA committee and also by expert reviewers for this project. The revised Final Report for this project, addressing comments from reviews, was submitted in December 2008. This project is completed.

Sensor Integration for Crash Avoidance for Trucks

Safety IDEA Project 13

Research Agency: California Polytechnic State University (Cal Poly)

Principal Investigators: Dr. Charles Birdsong and Dr. Peter Schuster

Completed: February 2011 - - Project Completed

IDEA Contract Amount: \$75,000

This project developed and tested a low-cost crash avoidance sensing system for over-the-road class 8 trucks, by testing and integrating several different sensor technologies.

A good way to improve accident avoidance is through systems capable of detecting objects around the vehicle and detecting accident risk before it occurs (through improved situational awareness) and either warning the driver or preventing dangerous actions. This technology can enable commercial trucks to respond to potential risks and improve the driver's awareness of surrounding vehicles and situations.

This project investigated a system that combines several different low-cost sensors with an integration algorithm to achieve more information than the sum of the parts. This system was designed to balance weaknesses of one type of sensor with the strengths of others. The investigators worked with an over-the-road class 8 trucking company to test and evaluate the system.

The Draft Final Report was reviewed by the Expert Review Panel for this project and by members of the Safety IDEA Committee. The revised Final Report for this project, addressing comments from reviews, was submitted in February 2011. This project completed.

Onboard Railroad Wheel Monitoring System

Safety IDEA Project 14

Research Agency: L-3 Communications Coleman Aerospace

Principal Investigators: David Jacobs and Michael McCurdy

Completed: February 2010 - - Project Completed

IDEA Contract Amount: \$70,000

The purpose of this project was to develop an economical onboard wheel monitoring system for railroad applications. Early detection of rail car wheel/bearing deterioration can help to minimize derailments and reduce damage to track. Advances in low power miniaturized sensors, processors and wireless communication systems could enable onboard wheel monitoring systems to be feasible.

The systems investigated in this project included a miniature device on the wheel axle assembly without any modification to existing equipment on the railcar; a wireless communication system forming a “discriminatory” mesh network, limited to the railcars on the train of interest, which communicates to a central monitoring station; and continuous monitoring of bearing temperature, vibration and acoustics, and wheel impact, allowing continuous data analysis.

The Draft Final Report was reviewed by the Expert Review Panel for this project and by members of the Safety IDEA Committee. The revised Final Report for this project, addressing comments from reviews, was submitted in February 2010. This project is completed.

Determination of the Longitudinal Stress in Rails

Safety IDEA Project 15

Research Agency: Texas Transportation Institute
Principal Investigator: Dr. Stefan Hurlebaus
Completed: July 2011 - - Project Completed
IDEA Contract Amount: \$75,000

The objective of this project was to determine the longitudinal stress in rails, in order to reduce rail buckling due to temperature-induced stresses.

Continuous welded rails (CWR) are typically long members which are susceptible to failure caused by significant temperature changes. Such rail temperature changes can cause rail buckling, which can cause considerable disruption to railroad operations and, in the worst case, cause freight or passenger train derailment.

An important parameter in analysis of temperature induced stresses is the rail neutral temperature (RNT), defined as that rail temperature at which the net longitudinal force in the rail is zero. The objective of this project was to determine the longitudinal stress in rails using the polarization of Rayleigh surface waves, in order to reduce buckling and fracture.

Investigators at the Texas Transportation Institute, which is an Association of American Railroads (AAR) Affiliated Laboratory, worked together to develop a methodology to determine the RNT in a nondestructive and non-contact manner. This could give the railroads the opportunity to check their rail system and to adjust the installation of the rails by installing the track system at the RNT. The potential safety benefits of this method are that it could reduce rail buckling due to temperature-induced stresses, which could decrease the number of train derailments.

The Draft Final Report was reviewed by the Expert Review Panel for this project and by members of the Safety IDEA Committee. The revised Final Report for this project, addressing comments from reviews, was submitted in July 2011. This project is completed.

Rail Vehicle Bearing Defect Detection

Safety IDEA Project 16

Research Agency: ENSCO, Inc.
Principal Investigator: Dr. Yu-Jiang Zhang
Completed: October 2011 - - Project Completed
IDEA Contract Amount: \$80,000

The investigators in this project conducted field testing to investigate the feasibility of detecting defective rail vehicle bearings using rail-mounted accelerometers.

The objective of this project was to test the technology under normal operating conditions to determine if the bearing signal detected by the accelerometers on the rail has sufficient signal to noise ratio to allow for reliable detection of bearing defects.

The project investigators worked with Norfolk Southern (NS) to conduct the field test on a continuously-welded-rail (CWR) railroad track that allows the test vehicle to travel at speeds up to 50 mph.

The project included test planning and design, equipment preparation, field testing, data collection, data analysis, and documentation.

The Draft Final Report was reviewed by the Expert Review Panel for this project and by members of the Safety IDEA Committee. The revised Final Report for this project, addressing comments from reviews, was submitted in October 2011. This project is completed.

Non-Contact Driver Drowsiness Detection System

Safety IDEA Project 17

Research Agency: Case Western Reserve University

Principal Investigator: Dr. Xiong (Bill) Yu

Completed: Project Completed 2012

IDEA Contract Amount: \$100,000

This project developed and tested the effectiveness of an innovative real time drowsiness detection sensor to minimize vehicle crashes due to driver drowsiness. The sensor non-invasively monitors the physiological signs of drivers and determines the onset and extent of drowsiness. The project investigators developed the non-contact electrocardiography (ECG) and electroencephalography (EEG) sensing platform.

This project evaluated the system performance by installation on a laboratory high fidelity driving simulator and on a truck. It also evaluated the effectiveness of different countermeasures.

DRIVE-SMART Driver Monitoring and Crash Risk Mitigation System

Safety IDEA Project 18

Research Agency: Virginia Tech Transportation Institute (VTTI)

Principal Investigator: Dr. Thomas Dingus

Completed: Project Completed 2012

IDEA Contract Amount: \$98,000

This project developed a driver monitoring and crash risk mitigation system, which is called DRIVE-SMART. This Safety IDEA project included development of the electronic hardware and software components, integration, and testing.

The system uses two small cameras, machine vision technology, on-board sensors, and data from the vehicle network to monitor driver distraction, drowsiness, speeding/aggressive behavior, alcohol impairment, and non-seat belt use. These are five major factors that can contribute to crash and injury risk. With the exception of seat belt use, redundant measures were used to reliably calculate individual and combined risk levels, for presentation of a real-time warning of elevated risk to the driver, and subsequent notification to authorities.

The relatively inexpensive system is wholly enclosed within a small and unobtrusive housing, which can be mounted to the windshield or dash to provide camera views of the driver's face and the forward roadway. Integrated, high-speed electronic components, including digital signal processors (DSPs), were used to ensure that warnings occur with sufficient speed to mitigate crash occurrence and/or severity, while avoiding false alarms. A single connection provides power and data access via the vehicle network's diagnostic connector.

Increasing Driver's Traffic Awareness around the Truck: Use of 3D Sounds

Safety IDEA Project 19

Research Agency: Volvo Technology of America

Principal Investigator: Dr. Dominic Paul Piamonte

Completed: Project Completed 2012

IDEA Contract Amount: \$100,000

This project developed and tested a system using 3D sounds as a technique for augmenting the truck driver's traffic awareness around the truck. This is intended to contribute to increased safety of road users near and around the truck.

Work showed the potential of spatial or 3D auditory icons for accurately informing and warning the truck driver of vulnerable road users (pedestrians, cyclists, small vehicle motorists, etc.) near and around the truck, with high acceptance and satisfaction of use among truck drivers.

Most modern large truck cabs have a lot of sound insulation, since too much noise inside a truck is known to affect the driver's concentration and stress level. However, sound insulation of the truck cab, along with the inherent limited view around parts of the truck from inside the truck cab, contribute to the reduction in the driver's traffic awareness around the truck. The system developed in this project is designed to improve the truck driver's traffic awareness around the truck.

Material with Improved Absorption of Collision Forces for Railroad Cars

Safety IDEA Project 20

Research Agency: Department of Mechanical and Aerospace Engineering

Principal Investigator: Afsaneh Rabiei

Completed: Project Completed November 2014

IDEA Contract Amount: \$100,000

This investigation examined the feasibility of using novel composite metal foams (CMF) with extraordinary properties of impact energy absorption capability, high temperature resistance, and fire retardant, with high sound and vibration dampening to improve the crashworthiness and safety of rail passenger cars and tank cars. CMF integrated into the structure of passenger cars or tank cars has the potential to significantly increase the crash energy absorption and safety of such structures. This would provide additional protection in case of collisions or derailments.

Numerous efforts have gone into understanding the mechanical properties of metallic foams in general and CMFs in particular. While most of those studies have covered the properties of the material under a variety of low-speed loading conditions, this study aims to extend the current knowledge by investigating the behavior of CMFs under high-speed loading rates to mimic the speed at which high-speed trains travel. For this purpose, the optimization of processing techniques for manufacturing CMFs took place first in order to enable the processing of large-scale and low-cost CMFs. Next a Split Hopkinson pressure bar was used to investigate the mechanical performance of CMFs under high-speed impact speeds of 13, 22, and 30 m/s (equal to about 30, 50, and 68 mph). The results showed that elastic modulus, strength, and total energy absorption of CMFs under such loading rates is significantly higher than those under quasi-static (slow) loading. This makes CMFs even more attractive for application in collision protection of railroad cars or other vehicles.

In the second set of high-speed loading experiments, mechanical properties of CMFs under higher strain rates of between 60 and 120 mph were studied using Hopkinson bar experiments. While most high-speed loading tests in the literature are up to low strain levels, this study is performed up to 50% strains. The results indicated high strain rate sensitivity for both steel-steel CMF (processed through powder metallurgy) and aluminum-steel CMF (processed through casting) samples, especially at lower strain levels up to 30% strain. This leads to a significant improvement of the energy absorption capacity of CMFs at higher strain rates. While the strain rate sensitivity of the parent material, micro-inertia effect, and shock wave propagation may contribute to the strain rate sensitivity of CMFs, the strengthening at high strain rates is mostly attributed to the kinetics of entrapped air inside spheres.

Moreover, our studies showed a great improvement in volume and weight saving while maintaining the same safety level, or dramatically improved safety levels, if the current weight of the Crash Energy Management System (CEMS) of railroad cars is maintained by using steel-steel or aluminum-steel composite foams.

Energy absorption per unit volume of steel CMFs at different loading rates (Figure 1).

Energy absorption @ 50% strain of 2 mm steel sphere in steel matrix CMF	Energy absorption @ 50% strain of 4 mm steel sphere in steel matrix CMF (MJ/m ³)
76 (MJ/m ³)	67 (MJ/m ³)

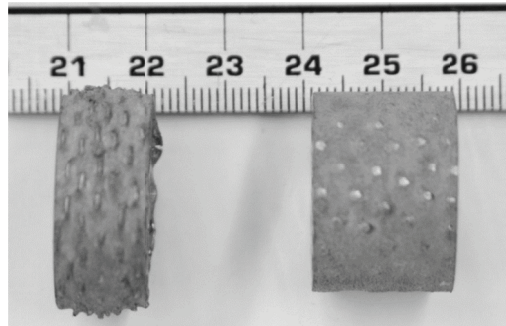


Figure 1: CMF samples with 4 mm steel spheres before and after high-speed impact.

The results of these studies provide us with a wealth of knowledge about the properties of CMF in different loading conditions with a variety of sizes and configurations, which is necessary for the design and manufacturing of full-scale CEMS prototypes in the future. This information is very useful for the utilization of CMFs in collision protection of railroad cars or other vehicles, as well as crushable workstation tables, tank cars, and more. It is notable that workstation tables on board rail cars need to deform in a graceful manner protecting the passengers sitting at the table, according to APTA standards. The current crushable tables are heavy in comparison with regular tables and require substantial structure to support them. CMFs can provide lightweight and exceptional energy absorption that can resolve the current issues with such tables.

The results of this study indicated a high strain rate sensitivity for both steel-steel CMF (processed through powder metallurgy) and aluminum-steel CMF (processed through casting). This can be translated to a significant improvement of their energy absorption capacity at higher strain rates, similar to those in collisions of railroad cars, which mostly resulted from the kinetic of entrapped air inside the spheres. The air will be heated due to fast plastic deformation of the foam under high-speed loading, resulting in higher air pressure inside the porosities and higher resistance against deformation under impact. This makes CMFs an excellent candidate for improving the safety of our trains. It is worth mentioning that the CMFs can provide additional capabilities such as being stable at high temperatures, fire resistant and not producing toxic fumes in the case of fire, and having high resistance against corrosion and chemicals compared with other current candidates of lightweight energy absorbers made of fiber composite plastics or polymers.

According to the results of this study, using steel-steel or aluminum-steel composite foams in the structure of CEMS of railroad cars will result in a great improvement in their performance while weight or volume is maintained. In the mean time, maintaining the same performance will result in a great volume and weight saving. The maximum force absorption by either type of CMF (aluminum-steel or steel-steel with various sphere sizes) is well exceeding the current FRA regulations of 800 kips buff strength for under-frame of conventional equipment and 1200 kips for alternatively designed equipment. This can be translated to a more efficient CEMS when CMFs are implemented.

Now that the properties of the material at various high- and medium-speed impacts are established in this current project, the application of the material in an optimized design structure of CEMS is necessary in order to take full advantage of the capabilities of the material in a final railroad car structure.

It will make sense to continue this research with a final step of design optimization, manufacturing a full-scale CEMS prototype, followed by a full-scale crash testing prior to the utilization of this novel material in railroad cars.

The technology for manufacturing CMFs is very easy to scale up and can be retrofitted into any production line. The PI is actively working to bring this technology into the market so that end users can benefit from its potentials in improving the safety of any structure such as trains, buses, or even cars.

Laser Cladding of Welds to Improve Railroad Track Safety

Safety IDEA Project 22

Research Agency: University of Houston
Principal Investigator: Francisco C. Robles Hernandez
Completed: Project Completed 2015
IDEA Contract Amount: \$100,000

The purpose of this project was to explore the use of a laser-based technology, laser cladding, to reduce surface and near surface defects resulting from thermite field welds of rail. If a successful laser cladding process can be developed, it would prevent plastic deformation, particularly along the heat affected zone (HAZ) at the weld site. The process has the potential to enhance rail safety and integrity and increase rail life expectancy.

Laser cladding is a process to apply metal coatings using a laser as a heat source. The laser melts the base metal and an additive powder to create a protective coating (Figure 1). Previous attempts to use this procedure resulted in cracking of the cladding. This project examined the cracking problem, investigated potential solutions, and explored the feasibility of using this technique in the field.

The main reason for the problem of cracking previously encountered in laser cladding is the formation of martensite during the cladding process. Martensite is brittle under dynamic impacts, so it negatively affects the fracture toughness of the cladding. The focal point of this work was the reduction (retention) of martensite during laser cladding in order to solve the cracking problem and thereby improve the service life of the welds.

Project tasks included the selection and testing of various powder compositions, thermal analysis during cladding, mechanical testing of the cladding, development of an improved laser cladding procedure, and in-service testing of laser cladding samples.

Initial project tasks included the evaluation of powders and the selection of a powder composition for use in the cladding process, and an investigation of alternative heat treatment protocols to solve the cracking problem. Sample sections of laser clad rail welds were then prepared using the revised process. These test sections were then installed and tested in the tracks at the Transportation Technology Center Inc. (TTCI) high-tonnage FAST loop at Pueblo, Colorado. The objective of these tests was to subject the test welds to 50 MGT (million gross tons) of heavy axle load train traffic and to monitor the welds during the tests.

Six test welds using the new laser cladding process were prepared. Two of the six were never installed in FAST due to the presence of pores in the cladding. The remaining four test welds were installed as two sets of two welds. The two welds in each set were installed in the same location. One weld was removed after approximately 20 MGT due to delamination of the clad-

ding. TTCI also removed the adjacent weld in that pair for safety reasons. Another test weld was removed after approximately 42 MGT, also due to delamination. TTCI again also removed the adjacent weld in that pair for safety reasons.

The project also examined the entire process necessary to apply laser cladding in the field. This included in situ heat treatment using induction or torch heating, and a preliminary assessment of other elements of the process including the use of CNC or robot arms and shot blasting or grinding of the welds.

The following is a summary of the results, conclusions, and recommendations of this project:

- Based on a limited sample of six welds made using the procedure developed in this project, the new heat treatment protocol appears to have solved the cracking problem previously encountered with laser cladding.
- The appearance of pores on two of the six test welds indicates the need for further investigation to determine the cause and cure for this problem.
- The delamination of the cladding on two of the four welds installed in the test track also indicates the need for additional investigation if laser cladding is to be further considered.
- Further consideration of laser cladding would also require a more comprehensive investigation of the entire process of laser cladding of thermite welds in the field from the standpoints of practicality and costs. Elements of this process of particular concern are the need for a heat treatment process suitable for use in the field, the need for high-precision CNC or robot arms, and the requirements for grinding or shot blasting of the rail as part of the cladding process.

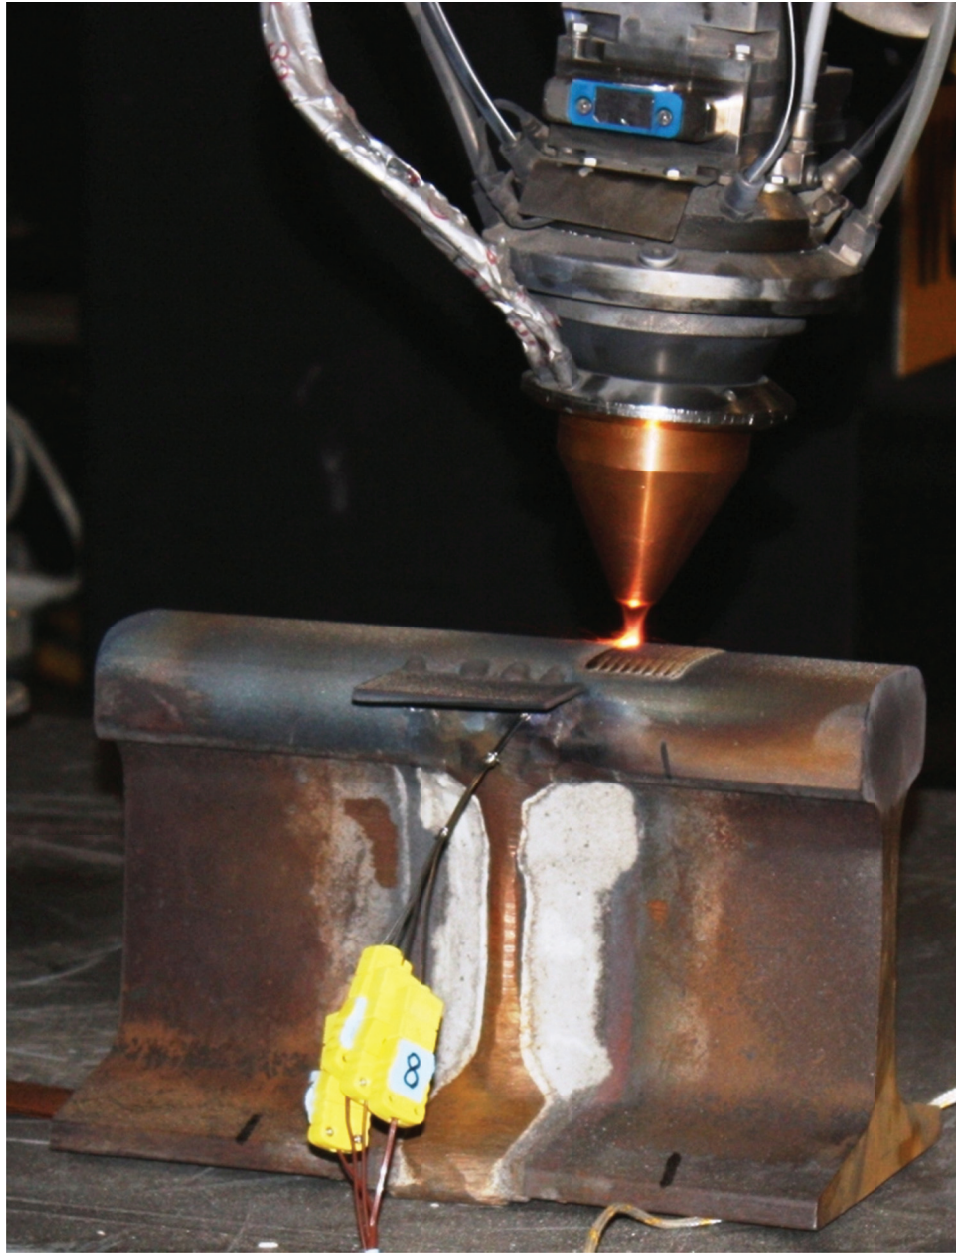


Figure 1: Laser cladding application showing thermocouples to record temperature.

Reducing Wheel Climb at Switch Points to Reduce Derailments

Safety IDEA Project 23

Research Agency: University of Delaware
Principal Investigator: Allan M. Zarembski
Completed: Project Completed 2014
IDEA Contract Amount: \$75,000

Wheel climb derailments in switches remain a major derailment category for both freight and passenger rail operations in the U.S. Wheel climb derailments occur at both high and low speeds, in both facing and trailing moves through the switches. While some causes are relatively straightforward, such as over speed entering or leaving the switch, or a broken point, most wheel climb derailments are a combination of a worn switch point (to include profile and angle of the switch point) and a worn wheel. A number of European railroads have adopted switch maintenance practices that focus on wheel climb in the switch point area, several of which have the potential to improve current U.S. rail maintenance practices.

This project included the results of a survey and detailed engineering analysis of international maintenance practices aimed at reducing the risk of wheel climb at switch points and describes the potential application of these practices for U.S. freight and passenger railways. As part of this activity, the study team examined international standards and practices from several major international rail systems and compared them with American Railway Engineering and Maintenance-of-Way Association (AREMA), FRA, and individual U.S. railroad switch point inspection practices. They then analyzed several of these practices from the perspective of the dynamic load environment of U.S. railroads to include expected lateral (L), vertical (V), and L/V force levels and the associated potential for wheel climb in the switch point areas.

The specific problems addressed by these practices and corresponding measurement gauges include:

- Improper flange contact between the wheel flange and the switch point (switch rail) that could lead to wheel climb.
- Excessive or unusual wear of the switch point (switch rail) and of the stock rail. This includes the condition where the stock rail head wear is greater than the wear on the switch point.
- Excessive switch point damage to include chipping and wear.
- Improper switch point (switch rail) profile to include switch rails with sharp gauge corner profiles.
- Excessively worn gauge face of the switch point or stock rail with corresponding sharp gauge face wear angle that could lead to wheel climb.

The researchers, working with an Expert Review Panel and Norfolk Southern research staff, developed a series of hand held measurement gauges to address these problem areas, based on European practice, and then modified to reflect U.S. conditions and practices. These gauges


were then taken out into the field, for evaluation on a series of switches in various conditions, by a team of rail experts. Those gauges that were considered to be ineffective were dropped from consideration. A series of three such field evaluations were performed in a yard provided by Norfolk Southern.

The specific focus of the evaluations and gauges was on switch point conditions not currently fully addressed by FRA, AREMA, or known railroad practices, but which have been shown to contribute to wheel climb derailments in switches.

The Study Team determined that several gauges were of real value in defining poor switch conditions that could potentially result in a wheel climb derailment. These include gauges that looked at several problems commonly seen in U.S. switch points, such as improper flange contact between the wheel flange and the switch point, excessive switch point damage, and excessively worn gauge face of the switch point or stock rail with corresponding sharp profile angle.

Specifically, the following gauges were recommended by the Study Team for further development and field evaluation, and potential adoption by U.S. railways and transit systems to control wheel climb derailments:

- Chipped Point (CP2) Gauge: This gauge addressed chipped or damaged switch points.
- TGAAR1B Gauge: This is the U.S. version of the Network Rail TGP8 gauge, using an AAR 1B new wheel profile. Switch point contact below the 60° mark appears to be an undesirable condition, and this gauge was judged to be a helpful aid to inspection.
- Severe Profile Gauge (SP Gauge). This is the new (third) generation severely worn profile gauge that appears to work well in the field and gives an indication of potential for wheel climb derailment for a severely worn wheel. Additional development work is required for their use as a go/no go inspection tool.
- Gauge face angle gauge (GFAG) with a 32 degree gauge face angle is recommended as a check on gauge face angle and potential for wheel climb, particularly for high L/V conditions.

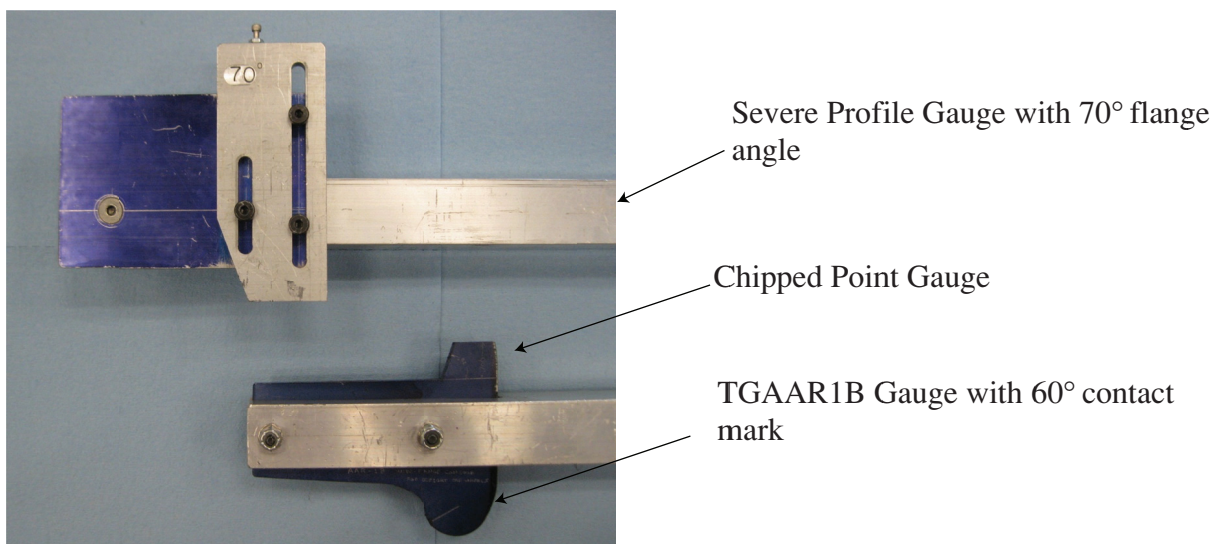



Unsafe wheel-rail contact as determined by TGAAR1B Gauge with contact below the 60° mark.

Based on the above tests and evaluations, it is recommended that railroads look into implementing the above recommended gauges for use in manual track inspections. A field demonstration of the gauges is recommended as the next Phase of the IDEA implementation activity.

High Speed Railroad Bridge Dynamics and Ratings

Safety IDEA Project 24

Research Agency: Hatch Mott MacDonald, LLC

Principal Investigator: Kevin Bollinger

Completed: Project Completed 2014

IDEA Contract Amount: \$99,000

Bridge rating calculations are performed to determine the safe capacity of existing bridge structures. The American Railway Engineering and Maintenance-of-Way Association (AREMA) *Manual for Railway Engineering* (MRE) contains the current recommended practice used by the great majority of railroads in North America. The Foreword to MRE Chapter 15, Steel Structures, limits the application of the chapter to freight train speeds of up to 70 mph and passenger train speeds of up to 90 mph. Therefore, the chapter provisions do not provide a method to calculate a bridge rating for train speeds beyond 90 mph.

As speeds increase, impact values either increase or decrease depending on the dynamic characteristics of the bridge structure and equipment using the track. Currently, Amtrak is operating high-speed passenger trains at speeds of up to 150 mph on the Northeast corridor. This project investigated impact factors for speeds above 90 mph, to be used in capacity ratings of existing bridges. To accomplish this, basic structural dynamic methodologies and current structural engineering codes and procedures were utilized to propose an impact evaluation methodology consistent with current North American railroad bridge practice.

The current MRE impact equation includes rocking and vertical effect components. The rocking effect reflects the side-to-side movement of a train as it travels down the track, while the vertical effect component reflects the dynamic load amplification effect caused by the following key factors:

- Bridge stiffness and mass
- Structure natural frequency
- Damping
- Span length
- Axle weight and spacing
- Train speed.

These factors were applied to various structural dynamic equations and known procedures common in the high-speed rail community. This allowed development of a moving load model used to determine the impact factor for train speeds greater than 90 mph. Results of the moving load model were then compared with field observations taken in November 2013 at Amtrak Bridge 155.85 (Figure 1) and prior impact tests reported by William Byers in 1970. Review of the field data showed that the mathematical model solutions compared well with actual bridge responses.

Once the model was verified with field data, calculations were performed establishing dynamic vertical effects at various train speeds (Figure 2), including those that induce resonance. The dynamic vertical effect value at resonance was then inputted into the AREMA MRE impact equation for a normal bridge rating. A flow chart was developed that illustrates the steps required for an accurate rating calculation.

In addition, calculations of vertical effects for five additional span lengths were completed. Examination of the phenomenon of resonance associated with different bridge span lengths confirms that resonance has a great influence on the dynamic vertical effect associated with the bridge and, as a consequence, the vertical acceleration of the bridge deck.

The authors recommended that steps now be taken to revise the AREMA MRE to incorporate these findings in order to accommodate higher train speeds.



Figure 1: Amtrak Bridge 155.85 over Usquepaug River, Rhode Island.

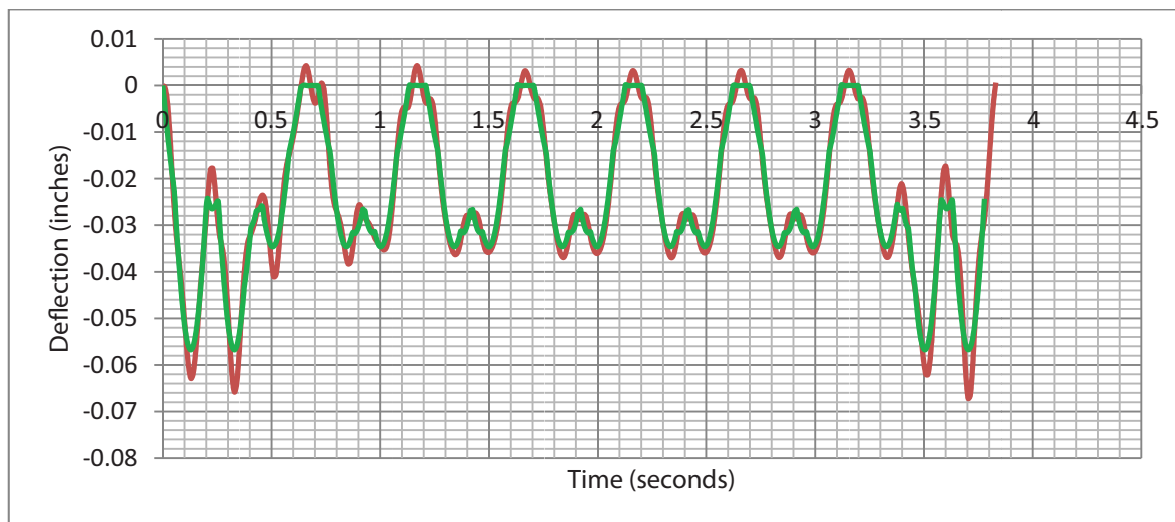


Figure 2: 120 mph train speed-induced girder deflections at midspan superimposed on the quasi-static 6 mph train.

Dynamic Impact Factors on Existing Long-Span Railroad Bridges

Safety IDEA Project 25

Research Agency: University of Connecticut, Storrs

Principal Investigator: Ramesh B. Malla

Completed: February 1, 2017

IDEA Contract Amount: \$100,000

Idea Concept and Product

There are many railroad truss bridges in the United States approaching or exceeding 100 years of age, which still carry a significant number of freight and passenger trains. Many of them are on passenger routes that are planned by Amtrak and FRA to be upgraded to carry passenger trains at much higher speeds than now authorized. Since these bridges are frequently part of a multi-span river crossing, the cost of replacement is very high. Thus, it is likely that these old steel structures will be called on to carry the higher speed trains. Hence, to ensure the safety of the bridges, it is essential to have a thorough understanding of the effects on them from higher speed trains.

This investigation aimed at understanding the live/dynamic load impact factor on existing older, long-span, steel truss railroad bridges caused by modern high-speed trains. The methodology is based on analytic/finite element modelling and field testing on an existing bridge. The first objective of this study was to develop an accurate finite element model (FEM) of the subject bridge. Second, field testing on the subject bridge was conducted under different types of common rail vehicles, with varying axle loads, axle spacings, and speeds. Using sensors on the bridge, static and dynamic responses, including strains, stresses, displacements, mode shapes, and frequencies, were recorded. The test results were compared with those obtained from the FEM. Once desirable correlation was achieved, thus confirming the validity of the analytical/computational model, the computer model was used to determine the effects of higher train speeds on the response of the bridge.

Project Results (or Planned Investigation)

A FEM of the eastern most, 217 ft., 2-track, Span 7 (next to the east abutment) of the nearly 110-year old seven-span Devon through open deck truss bridge over the Housatonic River between Milford and Stratford, Connecticut (Figure 1) was developed. Several field tests were performed at the bridge in 2014 and 2015. The 2014 tests were conducted under regular Amtrak Acela and Regional and Metro-North passenger trains at speeds close to or at 40 mph, the authorized speed limit on the bridge. The 2015 field tests were conducted using “test” trains provided by Metro-North Railroad and Amtrak (Acela train) at varying speeds of 5, 10, 20, 30, and 40 mph. Bridge response data (strains, stress, displacements, and accelerations) in floor systems members (stringers and floor beams), bottom chord eye bars, diagonals and end posts of the truss have been collected using appropriate sensors, strain gages, linear variable

displacement/differential transducers (LVDT), or accelerometers, The results of these tests have shown a close correlation with those predicted by the FEM analysis. Figure 2 shows sample strain gage readings from bottom chord eyebars, pictured in Figure 3. Figure 4 shows a comparison of LVDT measured displacement readings at node L8, north truss, at five speeds ranging from 5 to 40 mph. Figure 5 shows one of the bridge trusses with locations of various nodes indicated.



Figure 1: Span 7 of the Devon railroad bridge showing the open deck floor system and the truss structure.

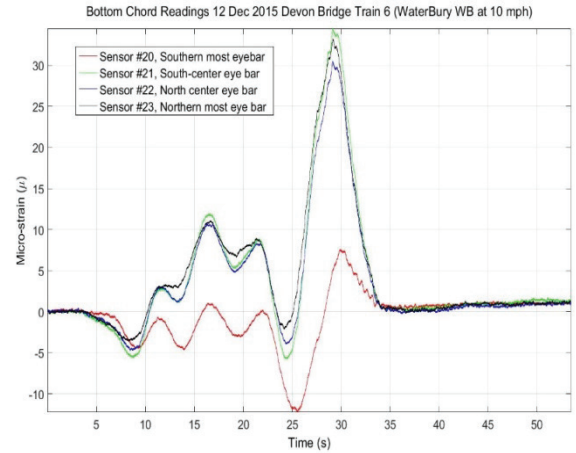


Figure 2: Strain readings on four eyebars, bottom chord L6-L8 South truss under Waterbury train westbound, on track 3 traveling at 10 mph.

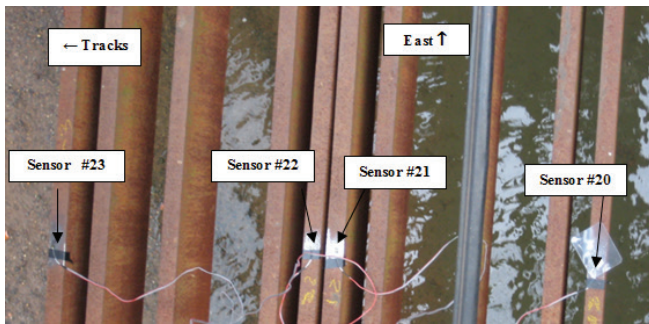


Figure 3: Plan view of bottom chord eyebars between nodes L6 and L8 (Figure 5) showing strain gauges attached.

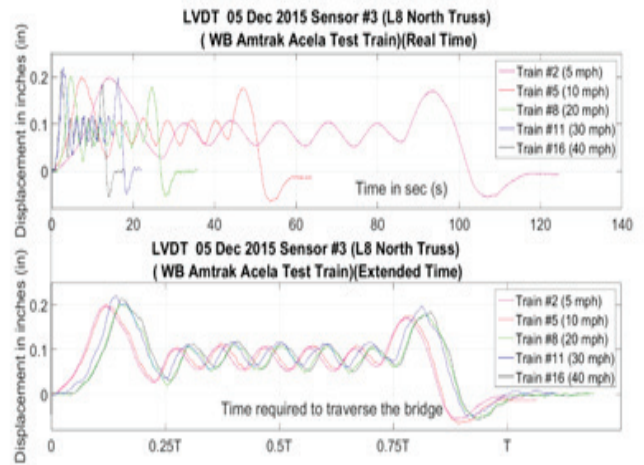


Figure 4: Vertical displacements at node 8 of Devon bridge north truss under Amtrak Acela train at various speeds.

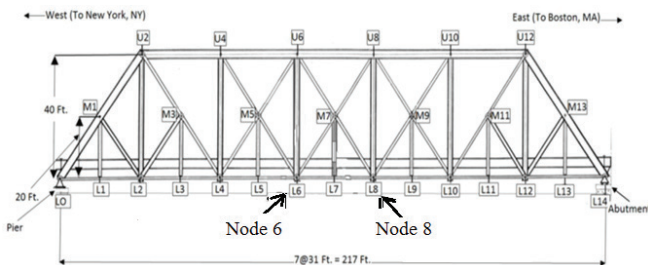


Figure 5: Elevation of the Devon bridge truss showing locations of various nodes.

A couple of representative conclusions based on the study include: (a) the strain readings from a group of eyebars making up the truss' bottom chord show evidence of the unequal stresses from one eyebar to another between the same two panel nodes; and (b) within the speed range considered, although the field test results indicated no noticeable difference in the amplitudes of vertical displacements of selected nodes with different train speeds, the results from the FE analysis of the bridge showed that at resonant train speeds there was a sudden increase in the displacement of a node, and different trains would induce this peak displacement at different speeds.

Product Payoff Potential

The ultimate objective of this research was to understand, through analytical/ computational study and field testing, the effects of train speeds on the dynamic impact factor on long span open deck steel truss railroad bridges. Of particular interest is to predict the effects on the bridge response due to trains operating at speeds higher than now authorized on these structures. Therefore, the research outcome has the potential to provide railroad bridge engineers with the a more rational basis in which to establish the safe loading carrying ability of old bridges, as well as its remaining life. Thus, it will have the potential to give the railroad industry better tools for rating existing bridges, designing new ones, and increasing bridge safety by better quantifying stresses due to live load impact.

Product Transfer

The results from the project should contribute to improving railroad safety and reducing the costs of upgrading existing railroad bridges to accommodate high-speed rail service, predict remaining life, improve rating of the structures, and increase structure safety and reliability. Therefore, the research results should find immediate use by state departments of transportation, USDOT FRA, Amtrak, and private railroad companies. The results from the research have been and will be continued to be shared through various modes of technical publications and presentations.

Acknowledgements: The principal investigator acknowledges, with much gratitude and appreciation, the financial and/or in-kind supports received for this research project from the following organizations: U.S. DOT Federal Railroad Administration, Transportation Research Board of National Academies of Sciences, Engineering, and Medicine; Bentley Systems, Inc.; Connecticut Department of Transportation; MTA Metro-North Railroad; AMTRAK; STRAAM Group; Trans-Tek, Inc.; and the University of Connecticut.

Remote Sensing with Mobile LiDAR and Imaging Sensors for Railroad Bridge Inspections

Safety IDEA Project 26

Research Agency: Florida Institute of Technology

Principal Investigator: Luis Daniel Otero

Completed: August 14, 2016

IDEA Contract Amount: \$100,000

IDEA Concept and Product

The overall goal of this research project was to investigate the applicability of mobile Light Detection and Ranging (LiDAR) and imaging sensors to help detect concrete cracks and displacement of railroad bridge components. This overall objective was divided into three research objectives. The first research objective included developing and evaluating prototype image processing algorithms for concrete crack detection and classification. The second included developing and evaluating three-dimensional (3D) models from LiDAR data to identify signs of bridge component displacements. The third evaluated the effects to the image processing algorithms and 3D models with data collected using an unmanned aerial system (UAS) with integrated LiDAR and imaging sensors.

Research Objective #1 - Algorithms to Detect/Classify Concrete Cracks:

The research team developed prototype unsupervised image processing algorithms to detect and classify longitudinal, transversal, or block cracks on concrete bridge surfaces (e.g., pile caps). The algorithms were evaluated using non-processed images collected with a UAS. The algorithms were 83% effective in correctly detecting and classifying concrete cracks.

Research Objective #2 - 3D Models to Evaluate Bridge Component Displacements:

For this research objective, a mockup bridge structure was constructed using polyvinyl chloride (PVC) material to conduct experiments prior to conducting more expensive field tests (see Figure 1a). A LiDAR sensor was placed on a tripod mount at a distance of x feet from the PVC structure, and a portion of the PVC structure was inclined y inches using wooden stakes. The alignment (i.e., registration) of LiDAR data to develop 3D models was accomplished using an algorithmic approach that does not require any GPS/IMU metadata. The resulting 3D models showed that a 0.5 inch inclination was easily identified with the sensor located 10 feet from the structure, and using only 20 LiDAR scans (see Figure 1b). Afterwards, 3D models were developed from LiDAR data collected with a UAS. Comparisons among the resulting 3D models from the UAS data acquisition approach versus those from the controlled sensor location approach indicated that there was no noticeable difference between them.

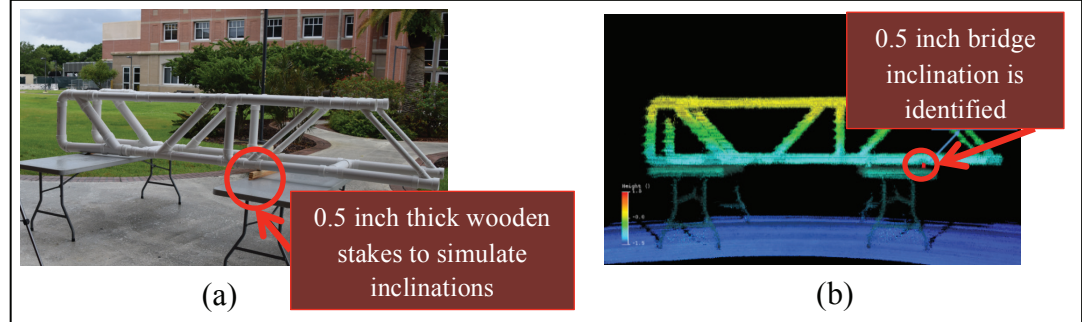


Figure 1: (a) PVC bridge for controlled experiments; (b) 3D model showing 0.5 inch structural deviation.

Research Objective #3 - UAS Prototype with Imaging and LiDAR Sensors:

A customized UAS was fully built by the research team to accommodate key subsystems such as the mobile LiDAR sensor and an onboard LiDAR data storage unit. The UAS, denoted multipurpose autonomous vehicle-flat eight (MAV-F8) was designed as a sensor testing platform capable of lifting relatively heavy and large sensor payloads. Figure 2a shows a snapshot of the fully integrated prototype MAV-F8 UAS. Figure 2b shows the UAS collecting LiDAR data during an indoor controlled test.

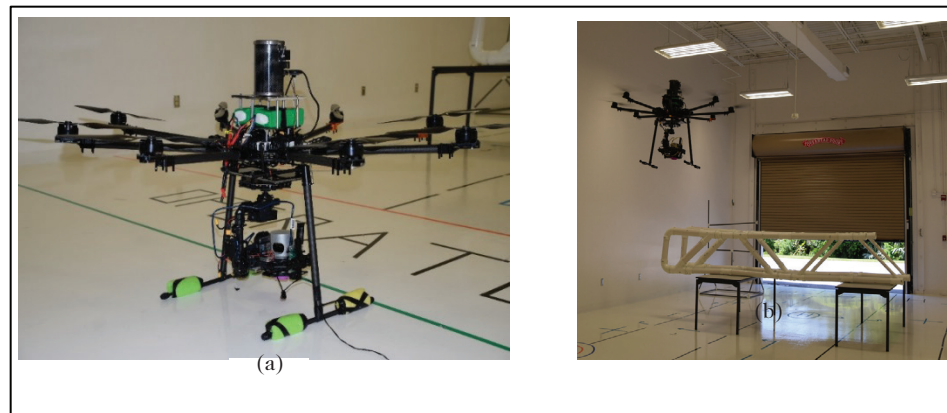


Figure 2: (a) Fully integrated UAS; (b) Indoor UAS flight around PVC bridge.

Figure 3a shows a CSX-owned railroad bridge in Palatka, Florida. Figure 3b shows a resulting 3D model from LiDAR data collected using the MAV-F8 UAS during field tests.



Figure 3: (a) CSX's railroad drawbridge; (b) 3D model of drawbridge from LiDAR data.

This research highlighted the potential practical value from using UAS and sensor technology for bridge inspection purposes. Potential payoffs for practice include improved safety and accuracy of inspections, and reduced inspection costs.

This research project significantly benefited from the support of the Florida Department of Transportation and CSX Transportation, Inc., which is one of the nation's leading transportation rail-based suppliers. The overall consensus from industry partners was that this technology has the potential to mature into a bridge inspection system that could positively and significantly impact performance, effectiveness, and safety associated with bridge inspections. Some of the future research directions that were identified by industry partners to realize such a system include more field tests on structures with known defects to determine the system's capabilities for defect detection; the development of user-friendly software interfaces for efficient user-system interactions on the field; the development of supervised learning algorithms for concrete crack detection and classification; and implementing a geo-referenced approach for LiDAR data registration.

FIELD EVALUATION OF BALLAST FOULING CONDITIONS USING MACHINE VISION

Safety IDEA Project 27

Research Agency: University of Illinois at Urbana–Champaign
Principal Investigator: Erol Tutumluer
Completed: September 6, 2017
IDEA Contract Amount: \$100,000

IDEA Concept and Product

The IDEA product is a proven machine vision concept for performing ballast condition assessment along the track. A new degradation index, Percent Degraded Segments (PDS), was introduced based on the machine vision algorithms developed to analyze in-service ballast cut section images and effectively quantify the level of ballast degradation in the field. This technology can potentially replace the current state-of-the-practice of visual inspection, sampling, and mechanical sieve analysis. As a component of a comprehensive Ballast Management System (BMS), the developed technology would help to evaluate designs and deterioration mechanisms of ballasted track and provide predictive service life and life-cycle analysis for improving the safety and network reliability of the U.S. railroad transportation system.

Project Results (or Planned Investigation)

Field images of vertical (longitudinal and/or transverse to the track) and horizontal cut sections of in-service ballast were collected from different track locations. An image processing algorithm was developed with three main modules including pre-processing, segmentation, and post-processing. The ballast cross section images collected in the field were analyzed to quantify different levels of ballast degradation from the images by the use of a newly introduced imaging based index called PDS. The PDS values from the field-collected images of ballast cut sections correlated well with the commonly used Selig's Fouling Index (FI) values obtained from sieve analysis results of the field collected ground truth samples. A color coding approach highlighting different sized particle images was found to be effective for the use of the image-processing algorithm. A Graphical User Interface (GUI) supported the efficient determination of image segmentation parameters.

Regression analysis established a significant correlation between FI and average PDS values. Using 28 field cut section ballast images and their sieve analysis results in the laboratory, a simple linear relationship was found to exist between the FI and PDS values with a coefficient of determination (R^2) equal to 0.84. Accordingly, this imaging based ballast degradation model was quite effective in estimating in-service ballast FI values, which typically ranged from 4 to 46 for a wide variation, from the image processing algorithm PDS results.

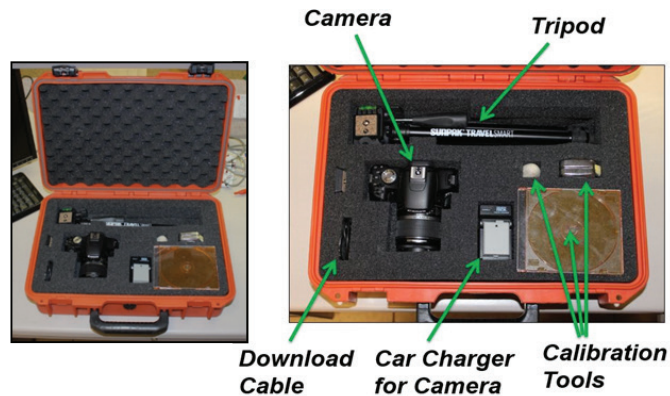


Figure 1: Ballast imaging kit.



Figure 2: Ballast evaluation kit.

Capturing horizontal cross section images of ballast from the shoulder is a feasible approach for determining the condition of ballast at different depths and along extended stretches of track. These horizontal sections indicated similar degradation trends to those produced by Shoulder Ballast Cleaner (SBC) equipment during routine maintenance operations. As such, horizontal imaging of shoulder ballast cross sections showed promise to enable SBC equipment to obtain degradation quantification at desired cutting depths and therefore, identify an optimum depth of shoulder cleaning or undercutting to achieve targeted ballast maintenance goals for improved drainage and stability.

Product Payoff Potential

The developed technology can quantify in-service ballast condition and its properties at any location, possibly identified by ground penetrating radar or other network condition monitoring devices, without the need for ballast sampling from trench cut sections. It can also be used with shoulder cleaning and undercutting equipment to automate the condition assessment using images of ballast cut sections below the ties. As such, this automated evaluation could greatly improve the quality and efficiency of ballast maintenance activities. In addition, the results of this process can be used for inspection purposes and to map out recommendations of follow-up rehabilitation strategies. Further, the proposed method has the potential to be applied for in situ evaluation of permeability and strength properties of railroad ballast at different degradation levels.

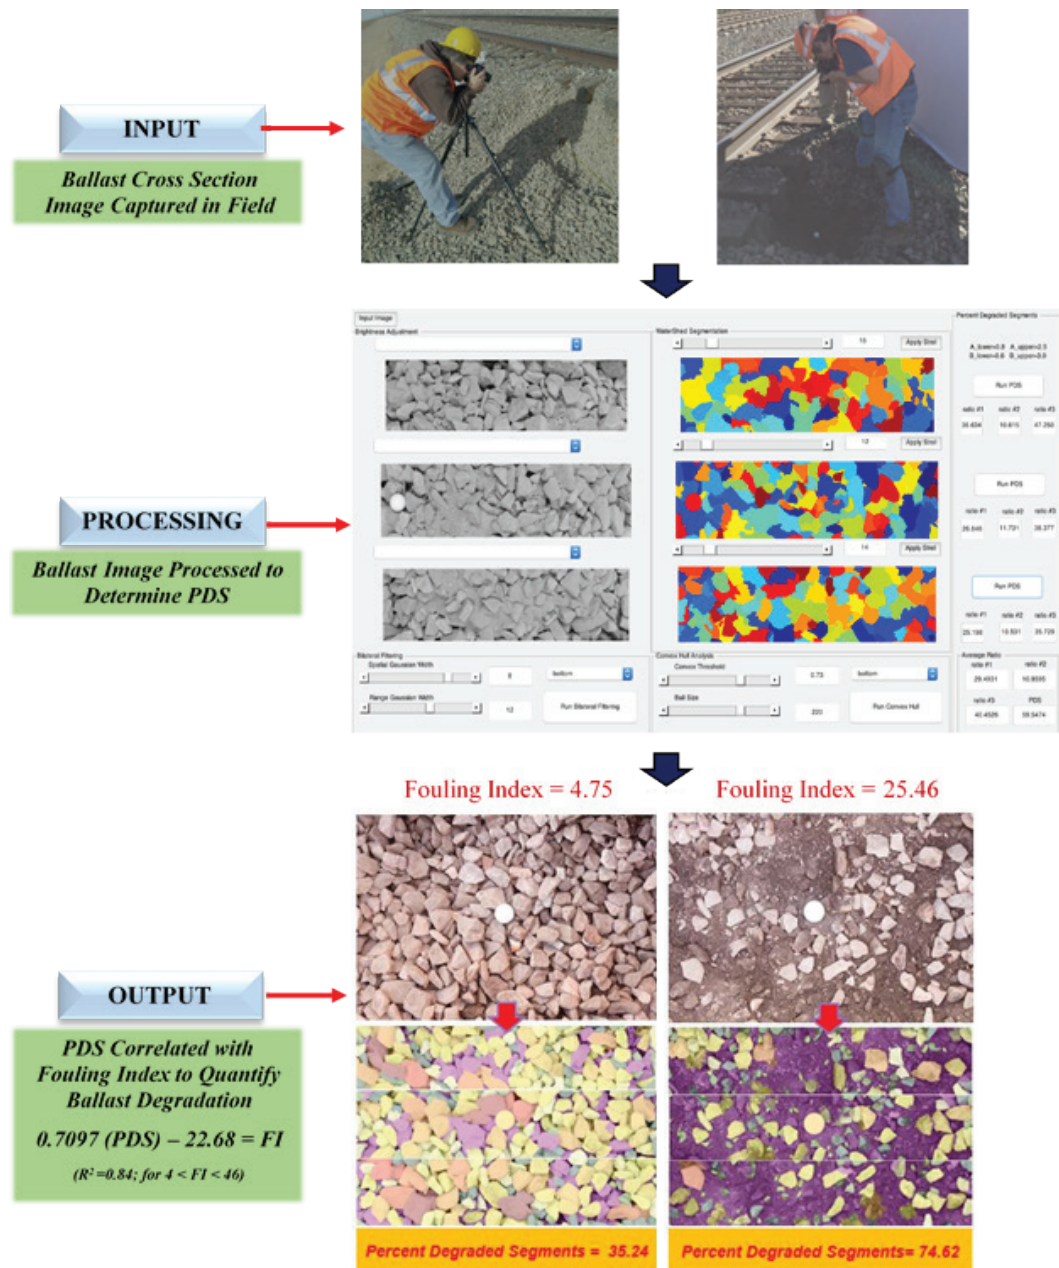


Figure 3: Imaging kit process.

Product Transfer

The IDEA product developed in this study provides an immediate application for a simple portable method, or inspector's kit, that can be used in the field, called the Ballast Imaging Kit (BIK), (Figure 1). A single inspector can perform spot-checking of ballast degradation levels in suspected problem areas by quickly gathering quantifiable evidence through imaging, and then, process these images using the innovative PDS method to determine suitable mainte-

nance and renewal decisions. A next step product will be the further development of the PDS technique into a user-independent image analysis software package. The conceptual Ballast Evaluation Kit (BEK), also shown in Figure 2, has been envisioned to run the proposed user-independent image analysis software on a laptop computer. This will enable the user to quantify ballast degradation levels using the BIK camera images taken on-site simultaneously. The integration of these two kits will be part of a future Machine Vision System for Shoulder Ballast Cleaners, which can be implemented over long sections of track to provide objective and continuous quantification of railroad ballast degradation levels. This future product will offer the capability to quantify railroad ballast field conditions objectively, continuously and reliably without the need for periodic ballast bucket sampling and laboratory sieving.

Field Validation of Inspection Gauges for Wheel Climb Safety at Switch Points

Safety IDEA Project 28

Research Agency: University of Delaware
Principal Investigator: Allan M. Zarembski
Completed: January 20, 2017
IDEA Contract Amount: \$82,179

IDEA Concept and Product

Wheel climb derailments in switches are a major derailment category for both freight and passenger rail operations in the United States. A recent IDEA project (S-23) looked at improved inspection tools that can be used to reduce wheel climb derailments at switch points. A set of four gauges were developed, each addressing a potential wheel climb mechanism:

- Chipped switch point gauge that examines potential for wheel climb at a chipped or damaged switch point.
- Wheel profile gauge that examines wheel/rail contact point and the potential for wheel climb due to improper contact associated with a worn switch point.
- Severely worn wheel gauge that examines potential for wheel climb at the switch point for severely worn (but non-condemnable) AAR1B wheel profiles.
- Gauge face angle gauge that examines excess gauge face wear of the switch point that can lead to a wheel climb derailment.

This activity is a field assessment and validation of four hand held inspection gauges on several major railroad systems to include Norfolk Southern (NS), BNSF, LIRR, and CN. It is intended to develop practical gauges that can be used by railroad and transit field inspectors to evaluate the condition of a switch point to prevent derailments at a worn or degraded point.

Project Results (or Planned Investigation)

The project has been completed. There were two rounds of field inspection, with the first using the prototype gauges developed under S-23 and the second using a modified set of gauges, based on the results and feedback of the first field test (Task 1). Under Task 1 a complete set of four inspection gauges were provided to six railroads and/or railroad consultants and measurements were taken by four railways plus an independent consultant who looked at a total of 272 switch points of different design configurations and conditions using the four study gauges. The tests were taken in more than 20 yards. Analysis of the results show reasonably good agreement with the railroad inspectors, as can be seen in Table 1 and feedback from the railroad using these gauges was extremely favorable. Agreement with inspectors ranged from 84% agreement between the inspectors and the gauges for LIRR to 44% for BNSF.

Case/Railroad	Number of inspections	% Agreement	% Disagreement
1. All inspections	272	58%	42%
2. CN only	135	49%	51%
3. All others	137	66%	34%
4A: BNSF	41	44%	56%
4B: LIRR	45	84%	16%
4C: NS	16	50%	50%
4D: Gary Wolf	35	77%	23%

Table 1: Turnout inspection results for Task 1.

Following the initial correlation analysis, a statistical decision tree analysis was performed on the data. Decision tree analysis is a “data mining” technique learning from a set of independent data events, which are in this case switch points inspections. The specific analysis approach used here made use of WEKA Data Mining Software and specifically the J48 algorithm, which chooses one attribute of the data that most effectively splits its set of samples into subsets enriched in one class or the other. For this data set, the J48 algorithm chooses a “sufficient” gauge in the top of the tree followed by gauges that are less “sufficient” further down the decision tree. In the analysis of the four gauges used, all were found to be “sufficient” for at least some part of the data and as such all four were determined to be needed.

Gauges	Case 1A: Full Data Set.	Case 1B: Full Data Set-Alternate CN Logic.	Case 2: CN Data Only.	Case 3: Non-CN Data.
Chipped point gauge	Not relevant	Not relevant	Most sufficient	Not relevant
AAR 1B wheel contact gauge	Least sufficient	Not relevant	Not relevant	Most sufficient
Severely worn wheel profile gauge	Most sufficient	Less sufficient	Not relevant	Less sufficient
Gage-face wear angle gauge	Less sufficient	Most sufficient	Not relevant	Not relevant

Figure 1: Decision tree matrix.

Based on the results of the field inspections and analyses, two of the gauges were modified and a complete new set of gauges sent to five railroads for evaluation (to include two new railroads). This new set of gauges was used in the follow-up field evaluation of the modified gauges which was conducted during the period from September 2016 to October 2016. Measurements were taken by four railways, TTCI and an independent consultant who looked at a total of 74 switch points of different design configurations and conditions using the four study gauges. As can be seen in Table 2, there was generally good agreement with the gauges, ranging from 74% to 100%¹ and an overall agreement of 82%.

¹ Not including CP which appears as an outlier.

Case/Railroad	Number of inspections	% Agreement	% Disagreement
All inspections	74	82%	18%
BNSF	19	74%	26%
LIRR	19	95%	5%
NS	10	100%	0%
CP	7	43%	57%
Gary Wolf	15	93%	7%
TTCI	4	75%	25%

Table 2: Summary of comparison between inspectors and gauges for Task 3.

Concurrent with this analysis, a probabilistic simulation analysis was performed, where the agreement percentages for the individual gauges and for all gauges combined were used with an analysis logic based on Monte Carlo Simulation. The probabilistic analysis showed agreement of no less than 82%, but with some gauges (e.g. gauge 2) having agreement as high as 92%. Furthermore, the overall agreement was 82%, which is consistent with the correlation results presented in Table 2 and supported the validity of the gauges in evaluating switch point condition.

Product Payoff Potential

Approximately 1,000 derailments per year are associated with worn or broken switch points, and these derailments are rarely if ever a simple single cause derailment. If properly designed and implemented, gauges developed under this task have the potential for significantly reducing the number of switch point related derailments together with an even higher number of “near misses.”

Product Transfer

Based on the results of this program, the committee has recommended that these gauges be made available to the railroad industry as well as to such railroad standards organizations as AREMA for industry implementation. The review panel has been in contact with AREMA committee 5 to review the gauges and has forwarded specific information to the relevant AREMA committees for review and potential incorporation into AREMA’s Manual of Recommended Practices.

In addition, the team has already stated to disseminate information about these gauges through railway media, conferences, and organizations. This includes an article published in the April 2017 issue of *Railway Track & Structures*, a presentation scheduled for the September 2017 AREMA annual conferences, a presentation at the January 2016 TRB annual meeting, a presentation at the University of Illinois RIVIT conference in June 2017 as well as direct discussion with several railroads and railway suppliers.

SECTION 2 ACTIVE IDEA PROJECTS

This section reports progress on all Rail Safety IDEA projects that were active during the 2017 year.

Self-Deicing LED Signals for Railroads and Highway Intersections

Safety Idea Project 29

Research Agency: University of Kansas
 Principal Investigator: Hongyi Cai
 Completed: Scheduled to be completed November 24, 2018
 IDEA Contract Amount: \$100,000

IDEA Concept and Product

This project will develop new self-deicing LED signals for highway signalized intersections and railroad signaling applications to solve a well-known problem of the existing LED signal light whose lens is too cool to melt snow and deice in wintery conditions. The snow-clogged signal lights can decrease the performance of signalized intersections and railroads and may result in collisions in inclement weather conditions. The self-deicing LED signal light will adopt an innovation of “Heated Lens Lighting Arrangement” or “Heat Arrangement of LED Arrays in Low Profile” (Figure 1) to harvest both the light and the heat generated by the same LED for illumination and heating of the signal lens.

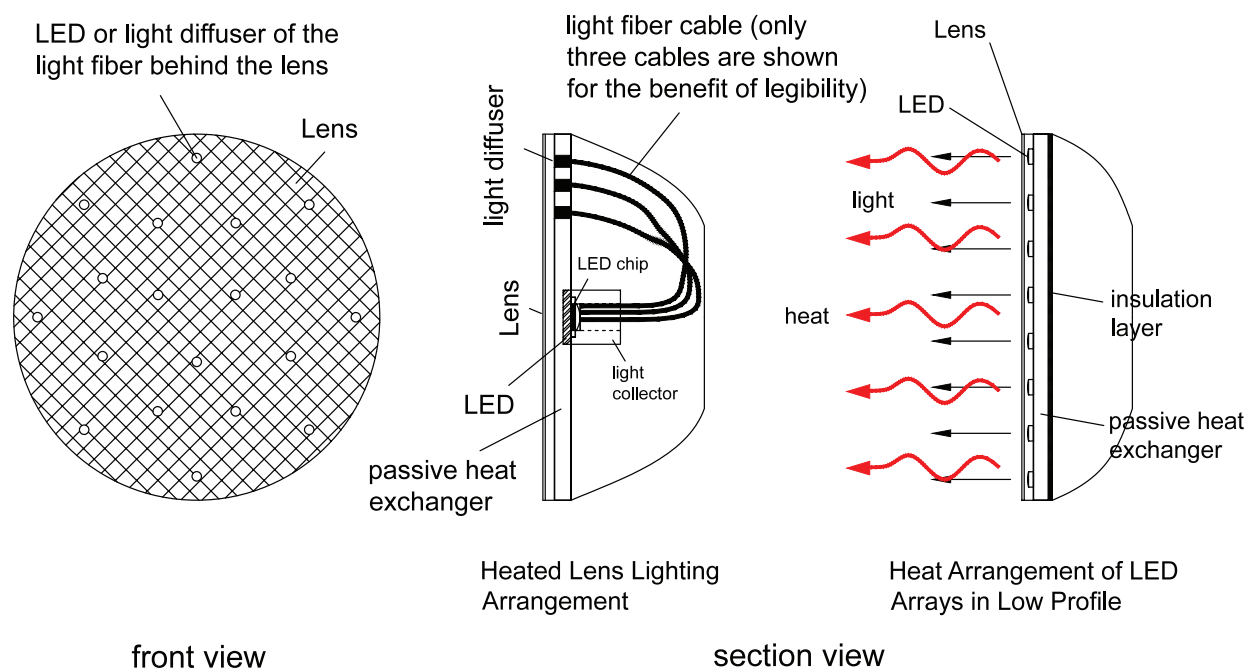


Figure 1: The concept of the self-deicing LED signal light, which adopts new architecture of “Heated Lens Lighting Arrangement” or “Heat Arrangement of LED Arrays in Low Profile” to harvest both the light and the heat generated by the same LEDs for lighting and heating uses. The heat generated by the LED(s) is harvested by the passive heat exchanger and stored to heat the lens for melting snow and deicing in wintery conditions.

Project Results (or Planned Investigation)

The investigative approach for the proposed project is divided into the three stages. Work in Stage 1 is underway and focuses on laboratory development and tests of prototype self-deicing LED signals. The research team has been developing and testing three prototypes of the self-deicing LED signals in red, green, and yellow light colors, including highway intersection traffic lights (12 in.), railroad wayside signal lights (5½ or 8 in.), and railroad at-grade crossing signal lights (6 or 12 in.). The team has been testing their best thermal and lighting performance to meet all requirements. Work in Stage 2 will focus on testing the three prototypes that will be mounted in closed-course settings. The research team will evaluate the thermal and lighting performance of the prototypes over one winter season in this manner. Work in Stage 3 will focus on the field tests of the prototypes on identified highway signalized intersections and rail track sections. The prototypes will be installed on pole-mounted signals as backup to the existing primary signals. At each test site, a security video camera will be mounted on a pole top facing the prototype signals at a close distance to monitor their real-time performance for melting snow and deicing in wintery conditions. Later, the research team will visit the test sites again to conduct a real-time performance measurement of those prototype signals under wintery conditions with heavy snow and ice, and hold an on-site demonstration to the project partners for final evaluation for their future implementation in practice.

Product Pay-Off Potential

Once validated, the self-deicing LED signal light is expected to be a viable replacement of the existing “cool” LED signal lights, the obsolete incandescent signal lights, and other emergent LED signal lights using additional heat generators and control sensors. If the self-deicing LED signals are implemented in practice, significant benefits (including safety and efficiency, cost savings, and environmental sustainability) to transportation agencies, districts and cities, railroad companies, and the driving public in the snow-belt states are expected. This system will not alter the function and sizes of the existing signal lights. There will be no need to add additional wiring inside and outside of the existing signal controller cabinets, and no need to change anything outside of the signal housing. The self-deicing LED signal lights could save on annual maintenance costs.

Product Transfer

A non-provisional patent application (No. PCT/US14/53503) was filed on August 29, 2014, for the innovation of “Heated Lens Lighting Arrangement.” Another relevant non-provisional patent application (Serial No. 15/486,797) was filed on April 13, 2017, which covers the second innovation of “Heat Arrangement of LED Arrays in Low Profile.” The research team and the University of Kansas Innovation and Collaboration (KUIC) have been reaching out to the signal industry for patent licensing. Pilot replacement programs are planned to displace the existing signals with the self-deicing LED signals in some collaborative state departments of transportation (e.g., Kansas, California, Michigan, New Jersey, Pennsylvania, Wisconsin, Maryland), the Union Pacific Railroad, and the Burlington Northern and Santa Fe Railroad. Once validated, the self-deicing LED signals are expected to be installed at highway intersections, Class I railroads, commuter railroads, and short line railroads in cold weather zones.

Development of Ballast Real Time Information System Based on SmartRock

Safety IDEA Project 30

Research Agency: Pennsylvania State University, Altoona
Principal Investigator: Hai Huang
Completed: Scheduled to be completed April 8, 2018
IDEA Contract Amount: \$100,000

IDEA Concept and Product

The objective of this research is to develop and test a Ballast Real-Time Information System (BRIS) that can detect non-visual (i.e., by track inspectors) ballast defects (usually early stage) and predict the possibility of future ballast in-service failure and be readily integrated into current operation safety mechanisms. Ballast layer deforms and displaces due to the movement of individual ballast particles. Different ballast particle movement patterns indicate different ballast performances and deterioration modes. Therefore, measuring realistic ballast particle movement pattern is one of the motivations and the first task of this proposed research. SmartRock is a wireless device developed by the principal investigator (PI) under the financial support from FRA-BAA. It can sense, record, and transmit its movement including: linear and rotational acceleration, velocity, and displacement in real time. It has user defined sizes and shapes that fit many civil engineering applications in the area of unbound particulate material. Three dimensional printing technology was employed to generate the shape of the SmartRock. Details of the SmartRock can be found in Liu et al (2015). SmartRock makes it possible for the first time to identify ballast defects/failure based on individual ballast particle movements. To that end, two ballast box loading experiments were designed and recently conducted at Penn State. In the first experiment, referred to as Stable, ballast was loaded with a cyclic loading equivalent to typical wheel loading and remained stable. In the second experiment, referred to as Moving, ballast was loaded with the same loading; however, the shoulder confinement was suddenly decreased to purposely create a progressive lateral failure such as the one shown in Figure 1. In both experiments, SmartRocks were installed and movements were visualized.

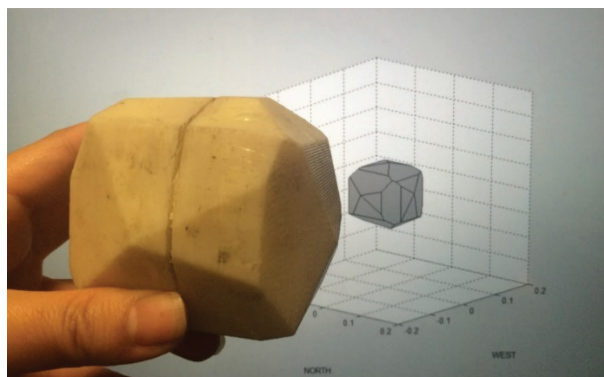


Figure 1. Real-time visualization of SmartRock.

Project Results (or Planned Investigation)

The proposed research is divided into the following three stages:

Stage 1: System (Hardware and Software) Assembling for BRIS

In this stage, multiple SmartRocks will be manufactured and form networks. Each ballast cross section to be instrumented will be equipped with a track side host which can communicate with SmartRocks via Bluetooth.

Stage 2: Laboratory Development of the “Critical” Ballast Particle Movement Patterns

In this stage, as many “failure causing” ballast loading conditions as possible will be generated by the Advanced Ballast Box system.

Stage 3: Near-Future Ballast Performance Prediction.

In this stage, Digital Image Aided Discrete Element Method (DEM) will be performed to predict ballast performance under future segment loading based on the information collected by SmartRocks during the current loading segment. Although DEM is believed to be one of the most promising tools to simulate ballast behavior, minimization of the predictive errors during DEM simulation process, especially long term process, has been a difficult task to overcome. The accumulation of errors due to extended simulation time and the nature of the geotechnical problems involving changing in loading, phase, and constitutive law could be so excessive that essentially undermine the accuracy of the final predictions. An algorithm that can integrate the future-telling power of DEM and real time sensing mechanism, SmartRocks will be formulated to significantly improve the prediction accuracy.

Product Payoff Potential

BRIS is expected to greatly enhance rail operation safety by timely warning the railroads of existing or potential track-geometry-damaging ballast defects. Once implemented, BRIS could also become a critical component of railroad track asset management practice and a foundation of preventative railroad track maintenance.

Product Transfer

After the completion of this project, the research team will work with Transportation Technology Center Inc. (TTCI) to test the functionality and the reliability BRIS in the field environment. After it is tested by TTCI, the team will contact one of the Class I companies (such as Union Pacific) to discuss the possibility of employing BRIS. A small business called Railroad Technology and Supplies (RTS) will be partnered with the team in terms of the hardware and software development and support during the implementation process.

Modeling and Validation of Standards for a Sleeper Compartment on Accessible Passenger Rail Vehicles

Safety IDEA Project 31

Research Agency: Oregon State University
Principal Investigator: Katharine Hunter-Zaworski
Completed: Scheduled to be completed June 4, 2018
IDEA Contract Amount: \$99,435

IDEA Concept and Product

This IDEA project extends the 3-D modeling of the accessible passenger train restroom and will build a full-scale soft mock-up of the sleeper compartment, which contains a restroom with a shower for evaluation by people with disabilities. The project is developing new designs and these are being verified and evaluated using 2-D and 3-D digital modeling of the sleeper compartment. One or two versions of the design will be evaluated in a soft mock up. An on-line survey is also being implemented to gather feedback from people who are unable to visit the soft mock up. Representatives of the passenger rail industry are involved throughout the project and the project results will be disseminated for use by the passenger rail industry.

Project Results (or Planned Investigation)

The user and technical requirements for the sleeper were established with the input from Rail Accessibility working groups familiar with the operating environment of high speed and long-distance trains. This includes the U.S. DOT, U.S. Access Board, VIA, Amtrak, and several car builders regarding dimensions, materials, standards, and safety/crash regulations for high-speed/ long-distance trains. Guideline criteria were based on technical, operational and user requirements.

Based on consultation with the Project Technical Advisory Committee, the design is proposed for the next generation intercity passenger rail cars. Specifically, the design is for long-distance passenger cars with two levels. The accessible sleeper compartment will be located on the lower level adjacent to the vestibule where an elevator will be co-located. It is recommended that the accessible sleeper compartment be located in a car that enhances the travel experience of people with disabilities. It is strongly suggested that the accessible sleeping compartment be located in the lower level of the observation car that is usually located adjacent to the dining car.

The use of 3-D digital modeling permitted evaluation of different configurations and layouts prior to construction of soft scale mock-ups. The 3-D modeling provides an opportunity to highlight spatial conflict areas and also optimizes the design. Siemens NX 10™ was used as the 2-D and 3-D modeling software in this project. It was selected due to its capability to incorporate anthropometric 3-D human models for analysis on spatial consumption and

reach. These models may be extended with Siemens Jack to account for the growing obese population. Models of the restroom and shower room, and sleeping areas previously made with Solidworks© were imported to Siemens NX 10™.

The sleeper design was based on several existing reference sleeping and restroom designs. Three dimensional models of the restroom were created from the 2-D floor plans in part based on dimensions received from Amtrak's Acela lavatory (toilet, sink, grab bars); these were modified to better accommodate accessibility needs based on documented recommendations (Bobrick, 2010). Three dimensional models of the sleeping area were created with modified versions of flatbed seats obtained from aerospace seating manufacturers and generic placeholders for amenities. Three dimensional models with 95th percentile male human models were created and sent to the Advisory Committee for additional feedback on amenities and spatial allocation. The Advisory Committee consists of stakeholders from both the user population and rail industry. Feedback was received with regards to spatial consumption, reach, inclusion of amenities, and accessibility. At the project kick off meeting the Advisory Committee strongly recommended that the shower and toilet area be incorporated into the sleeping compartment. Additional design objectives are to create designs that maximize accessibility and meet user needs while being conscious of revenue and real estate on the car. Figure 1 is a 2-D layout of the proposed mock up. This version is designed to accommodate up to four passengers with two sleeping berths at floor level and two upper bunk beds.

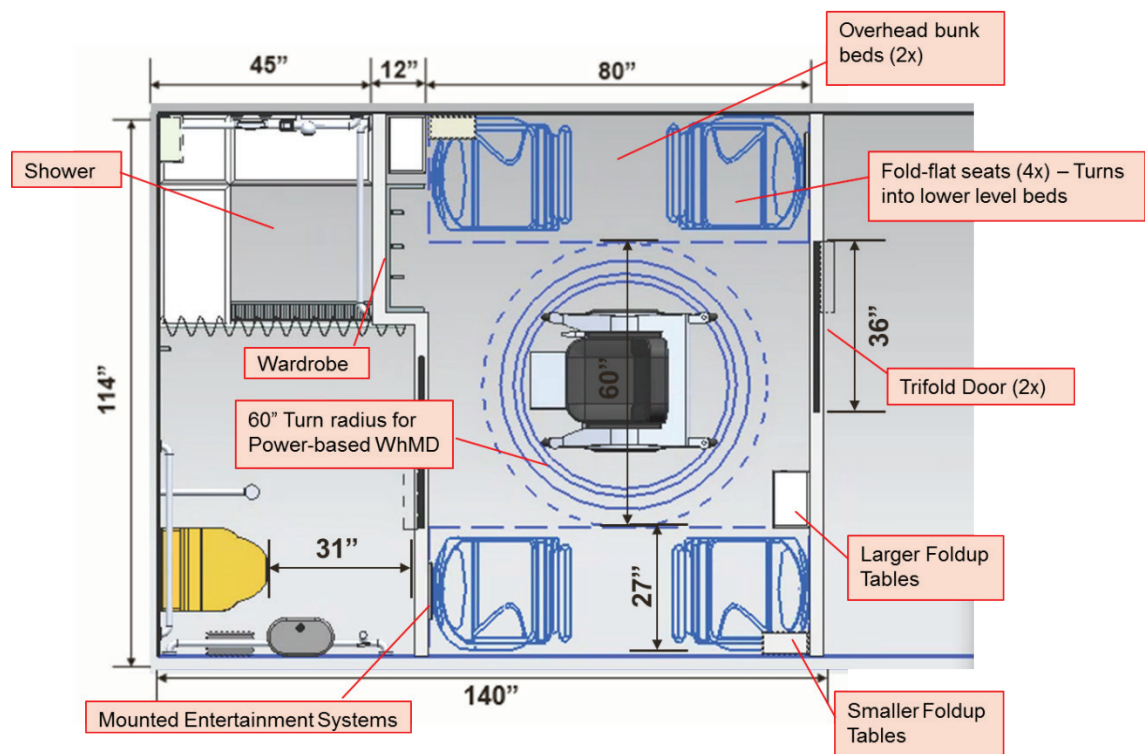


Figure 1: A 2-D rendering with notes and limited dimensions.

Due to limitations imposed by the OSU IRB, no actual transfers to any components will be permitted, so the use of renderings for the soft mock-up will be used. The digital modeling provides the opportunity to develop large scale renderings that can be used in the soft mock-up. These renderings will depict different scenarios that can easily be evaluated. The soft mock-up will also permit some flexibility to adjust some of the spatial arrangement of features. This is particularly important for the location of amenities such as grab bars, vanity, and controls. Figure 2 is a schematic of the sitting room in the daytime configuration. The single seats that are depicted are just placeholders. It is anticipated that the seats shown in Figure 2 are more representative than those shown in the schematic. Also shown are the two bunk beds that would be fully stored away during the daytime but are rendered to illustrate their location. This figure shows a large wheeled mobility device and a personal care assistant who can provide assisted transfers to the seat. This figure also shows the biomechanics analysis toolbox that will be used for analysis.

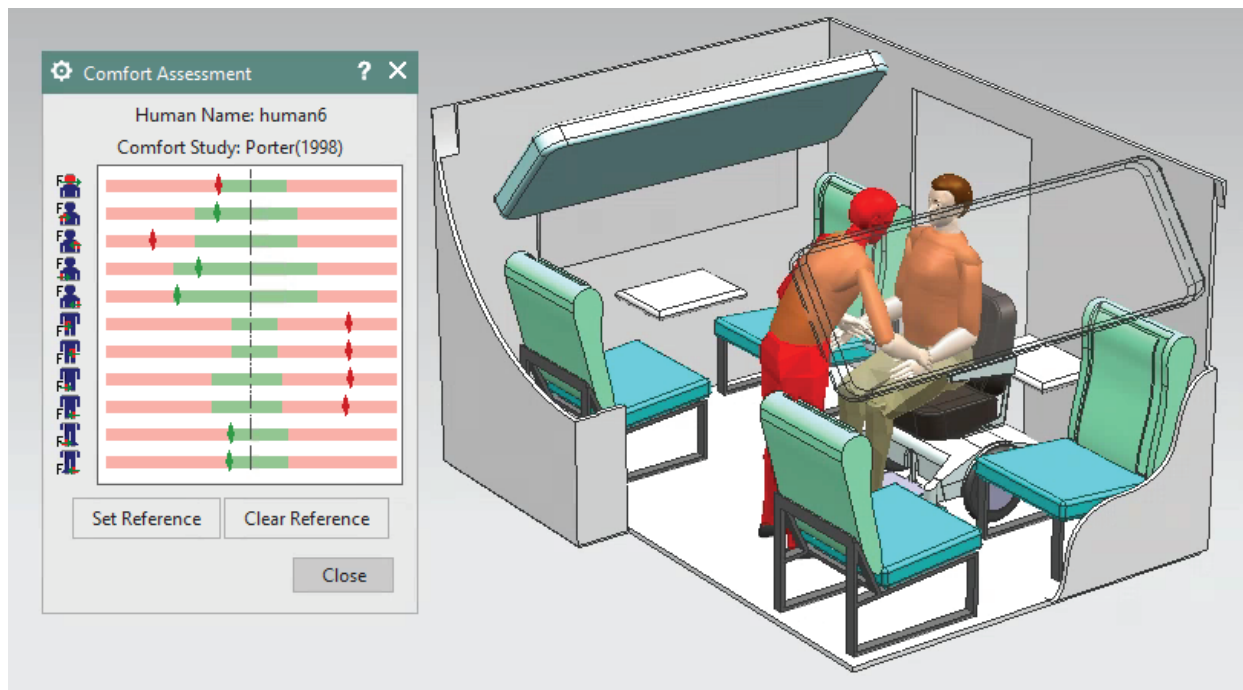


Figure 2: 3-D Schematic of sitting room in daytime configuration with bunk beds shown in semi-down position for illustration. Transfer model and evaluation form.

Product Payoff Potential

The need to develop fully accessible rail cars has already been expressed by the industry through the FRA, RVAAC and the PRIIA accessibility working group. Involvement of the industry stakeholders in the development of the specifications through modeling and full scale soft mock-up evaluation is very important for developing guidelines that are cost effective. A key part of the design optimization is to balance the use of space and impact on revenue seats. The proposed design has four revenue seats and berths in the accessible sleeping compartment and is designed to accommodate families and also one or two people with disabilities. The new designs and guidelines will allow cost effective implementations to standardize applications and provide consistency for the industry and the user. Implementing new designs from the beginning are more cost effective than retrofitting existing rolling stock; however the new design does have the potential to be retrofitted onto existing rolling stock. The use of a 3-D modeling for evaluation of the designs saves the industry both time and money.

Product Transfer

The rail industry is a key stakeholder that will be involved in most of the project activities. It is anticipated that the design guidelines for the sleeper compartment will assist the rail industry to introduce universal sleeper compartment modules for the next generation of long distance and high speed trains for persons with mobility and sensory impairments, and seniors.

Railroad Bridge Inspections for Maintenance and Replacement Prioritization Using Unmanned Aerial Vehicles (UAVs) with Laser Capabilities

Safety IDEA Project 32

Research Agency:	University of New Mexico
Principal Investigator:	Fernando Moreu
Co-Principal Investigator:	Mahmoud Taha
Completed:	Scheduled to be completed March 28, 2018
IDEA Contract Amount:	\$99,400

IDEA Concept and Product

This research focuses on the development and implementation of contact-free, reference-free transverse bridge displacement measurements. The research includes a concept test for integrating UAVs and laser technologies to assess the structural condition of simply supported spans of conforming steel railroad bridges, which will be instrumental in informing the subsequent prioritization of more detailed inspections. The primary tasks for developing this system are robust integration of a Laser Doppler Vibrometer (LDV) sensor with a copter-type UAV, optimization of sensor data accuracy, optimization of UAV positioning and movement characteristics, and effective data analysis methods to measure displacements. The main emphasis of this research is freight traffic and transportation, but the application is expected to assist any other type of railroad operation, such as passenger and intercity passenger rail.

Project Results (or Planned Investigation)

Initial testing focused on characterizing constituent components of the system: the behavior of the copter UAV, the data from the LDV, and the expected data from current measurements of this type using conventional methods. The data of the LDV sensor was compared to a common tool for linear displacement, the linear variable differential transformer (LVDT), for an analysis of the relative data outputs before any mounting to the UAV. Once characterization of the constituent components was completed, the components were integrated into a preliminary testing platform and data were collected to determine their effects on data output of the LDV. These data were collected outdoors for preliminary validation of the new technology. Results indicated that the prototype was able to monitor movements simulating the vibrations of a train crossing (Figures 1 and 2).

In the aftermath of this testing and completion of the preliminary stage of the project, further testing is planned at the Transportation Technology Center, Inc. (TTCI) in Pueblo, CO. There, the testing will incorporate the actual structure of a railroad bridge for displacement measurements. Additionally, this will highlight any disturbances to data collection or flight behavior introduced by the train running near the drone, or other safety considerations required prior to implementing this technology on revenue service. Prior to the testing at TTCI, further experimentation will be conducted to characterize the movements of the UAV and to filter



Figure 1. First outdoor laser UAV testing for measuring contact-free, reference-free displacements (Albuquerque, New Mexico).

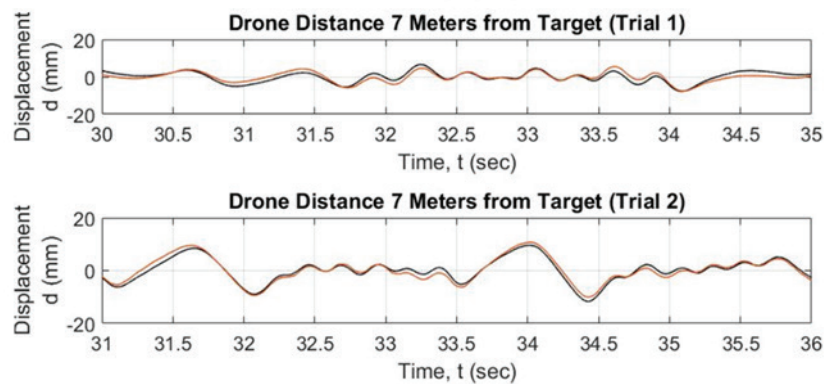


Figure 2. Contact-free, reference-free displacement validation.

them out of the LDV displacement data. Finally, collaboration with CN railway and Polytec, Inc. will ensure that the industrial development needs for the maturing of this technology for field implementation are met.

Product Payoff Potential

The implementation of this technology will allow for more efficient and effective measurements of displacement on railroad bridges during train crossing events, ensuring safe working conditions for the operator and allowing for measurement of bridges too tall for statically mounted sensors. This data is valuable for assessing the safety of train operations and assessment of safety at the network level (i.e., for multiple spans and multiple bridges within a given territory).

Product Transfer

The current implementation is limited by the cable connection from the data collection module to the LDV mounted on the UAV. Current discussions with the sensor manufacturer, Polytec, Inc., are underway to evaluate the potential use of a smaller form factor sensor that would avoid this cable connection. This would allow for measurements to be taken on structures of any height, rather than just those within the height of the cable.

Adaptive Prestressing System for Concrete Crossties

Safety IDEA Project 33

Research Agency: University of Illinois at Urbana–Champaign

Principal Investigator: Bassem Andrawes

Completed: Scheduled to be completed July 31, 2019

IDEA Contract Amount: \$100,000

IDEA Concept and Product

This project introduces an innovative technology that aims at resolving one of the most critical issues related to the safety, durability, and serviceability of railroad track systems, namely cracking of prestressed concrete crossties (e.g., center bound and end region cracks). The variability in the prestress state of the crosstie over its service life was found to be a major factor leading to such cracks. Conventional prestressing methods apply constant prestressing to the entire length of the crosstie to achieve the desired strength, resulting in an inefficient system. This proposal suggests an innovative and cost-effective concept for introducing, monitoring, and adjusting prestress forces within the tie in the field using adaptive prestressing system (APS). With the use of innovative prestressing materials, it is believed that a method can be developed to introduce prestress in specific areas of concrete as needed by embedding shape memory alloy (SMA) fuses in the required region; see Figure 1. This novel concept will enable us to control the level of prestress at certain regions of the crosstie and to accommodate the variations in support conditions, loads, and even climate conditions throughout the service life of the crosstie. The proposed technology will improve the safety and longevity of the ties.

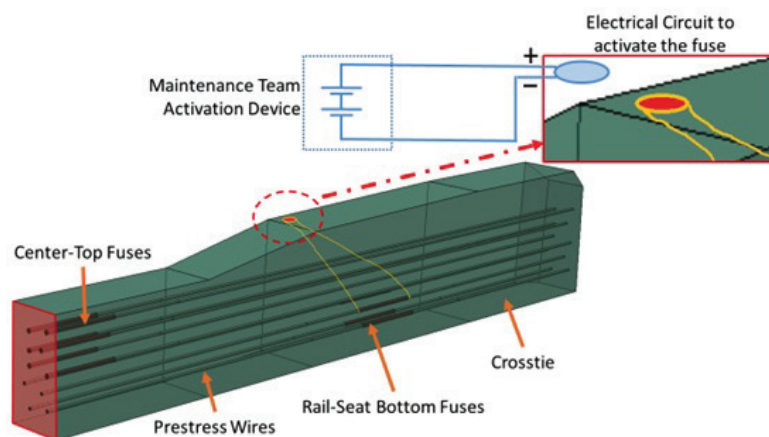


Figure 1. Schematic illustrating the use of SMA fuses to develop APS in concrete crossties.

Project Results (or Planned Investigation)

The research work planned for this project has two main stages. Stage I will focus on examining the proposed concept of using APS in crossties using 3-D finite element analysis and material testing and characterization of various components of the APS. Set of models of APS reinforced crossties will be analyzed to examine the viability of the proposed concept in an existing, industry-used crosstie design. The optimal location of the SMA fuses and their dimensions will be looked into with the help of these models. The models will also provide an insight in the effectiveness of the proposed concept in prestressing the specific regions of the crosstie. Based on the results of the numerical simulations, an APS assembly (i.e., SMA fuse connected with conventional prestressing steel wires) similar to the one examined numerically will be developed and tested experimentally. Post-activation behavior of the assembly will be studied including the evaluation of any prestress losses. An electrical power source will be utilized to carry out the test.

Stage II of the research will focus on examining the APS concept experimentally using large-scale components and crossties. First, concrete blocks will be cast and tested with a single set of APS. Possible ways to activate the SMA fuse will be developed and tested. Next, full-scale testing of constructed crossties with embedded APS will be carried out using loading frame. The tests will be conducted as per the standards suggested by AREMA, Chapter 30, using four-point bending. The crosstie casted with APS will be tested under static loads while varying support conditions using elastomeric pads. Commonly reported support conditions such as center-binding, lack of rail-seat support as well as full-support conditions can be recreated using different arrangements of the elastomers. The aim of the tests is to observe and compare the effect of APS on the behavior of the tie compared to conventionally prestressed crosstie designs.

Product Payoff Potential

The proposed APS system will provide designers with the ability to easily adjust the design of the crossties (i.e., location and amount of prestress force) based on track and load conditions. The current pretensioning technique provides designers with no control over the area of the cross-section where prestressing is being applied. It will provide maintenance teams with a tool to inspect/monitor the level of prestressing in the crosstie while in service and, if needed, adjust the level of prestressing force at certain areas where under- or over-stressing is observed. The delayed application of prestress in the proposed APS will help reduce significantly the level of prestress losses due to concrete creep/shrinkage and steel relaxation compared to that in conventional pretensioning method where prestressing is applied early (typically few days after concrete casting).

Product Transfer

Crosstie manufacturers participate in the research by producing the ties that will be used for testing. Collaboration with these manufacturers seeking feedback on the development of the new technology will facilitate the dissemination of the research results and the transfer of the proposed APS concept into a final product. Furthermore, the findings of this research will be presented in major transportation and railroad conferences and meetings including the Transportation Research Board (TRB) annual meeting and the AREMA annual conference.

Prototype System for Managing and Analyzing Enterprise Rail Transport Risks for Hazmat

Safety IDEA Project 34

Research Agency: FACTOR, INC.

Principal Investigator: Ravi Palakodeti

Status: Scheduled to be completed in September 10, 2018

IDEA Contract Amount: \$99,942

IDEA Concept and Product

This project will result in the development of an innovative prototype system for freight rail carriers to evaluate network-level safety risks for comprehensive hazardous material (hazmat) traffic flows. The unique concept is the application of a quantitative framework for risk accumulation occurring from multiple hazmat movements across rail carrier networks, rather than evaluating risk only on a route-by-route basis. The product application aims to provide a systemic understanding of risks that railroads need for making risk-based investments and resource allocation decisions to improve overall railroad safety.

Planned Investigation (or Planned Investigation)

The objective of Stage I activities is to assess and compare railcar-based risk approaches, commonly accepted as standard practice in rail hazmat risk assessment, and compare them with the more recently developed train-based risk assessment models. This task will help ascertain the pros and cons of both models, and assess their applicability as well as their readiness for practical implementation within the context of the system being developed. The results from this evaluation will be summarized to complete Stage I.

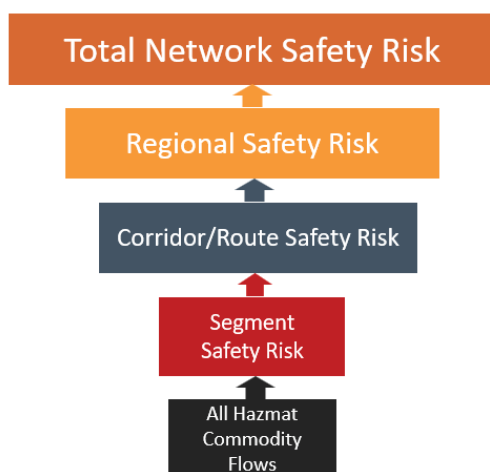


Figure 1. The concept of safety risk accumulation from comprehensive hazmat movements to support a network-level measure of risk

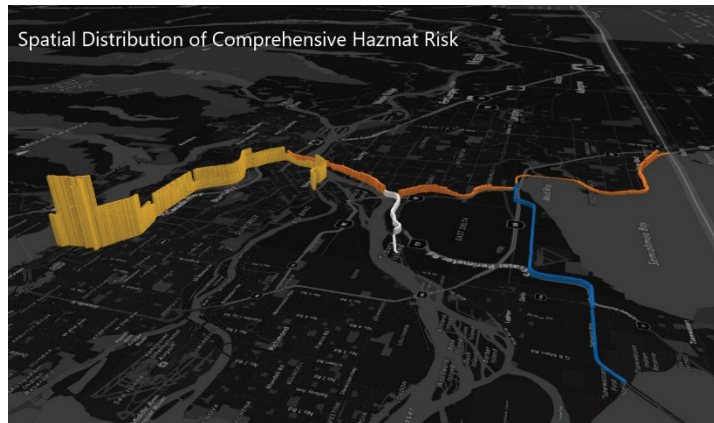


Figure 2. Example visualization of spatial distribution of risk. This is just one of the many possible ways of understanding and communicating network risk and its components.

Stage II activities will involve development and testing of the prototype system based on the results obtained from Stage I. We will develop intuitive, web-based user interfaces and data visualization capabilities to process and interact with the network-level safety risk data and supporting datasets. Additionally, the prototype will be enhanced to implement and quantitatively evaluate risk reduction strategies for different sections of a railroad operational network. Finally, we will seek feedback and testing from our railroad partner to further improve the utility of the prototype system.

Product Payoff Potential

The prototype system will represent a significant advance to the state-of-the-practice for the freight rail industry and specifically supports critical decision-making for improving network safety, including: (1) determination and prioritization of high-risk network locations by considering comprehensive hazmat movements across operational networks; (2) advanced evaluation of routing alternatives for individual commodity movements and verification of estimated safety risks for selected routes when considering the accumulated risk from other hazmat shipments traversing the same network regions; (3) evaluation of the impacts of additional shipments from adding new hazmat customers; (4) monitoring network safety risk for significant changes in trends; and (5) comparison of the effectiveness of proposed risk mitigation strategies and identification of the network locations at which those strategies potentially achieve the greatest risk reduction for limited safety investments.

Product Transfer

Through collaboration and testing with our railroad partner Norfolk Southern, we will gain valuable insights into how this prototype system can be scaled-up and enhanced to mesh with existing commodity flow systems and prepare the prototype for wider adoption.

Non-Contact Deflection Monitoring System for Timber Railroad Bridges

Safety IDEA Project 35

Research Agency: Florida Atlantic University
Principal Investigator: Sudhaġar Naġarajan
Completed: Scheduled to be completed in March 31, 2019
IDEA Contract Amount: \$100,000

IDEA Concept and Product

This project will develop an innovative non-contact linear feature based deflection measurement system using Terrestrial Laser Scanning (TLS) and cameras for timber railroad bridges. The requirement of control points to register images will be circumvented by using the 3D model of the bridge collected in dead load condition by TLS. This research project will develop a rigorous linear feature based registration mathematical model to determine the orientation of images, so they can be used to derive 2D/3D deflections under different load conditions. Though this research mainly focusses on timber railroad bridges, it is likely to be applied on other railroad bridges such as steel and masonry. The project will (1) develop a Deflection Monitoring System (DMS) that includes a camera; (2) develop a linear feature based registration methodology for the DMS; (3) develop a non-contact methodology to compute instantaneous 2D/3D deflections; and (4) perform experiments to validate the performance of DMS.

Project Results (or Planned Investigation)

This project will be performed in two stages. Stage 1 will develop a non-contact DMS and necessary rigorous mathematical models. Stage 2 of the project will implement the developed DMS and algorithms in the field and validate the overall methodology in collaboration with the railroad industry.

The tasks of Stage 1 of the project are definition of camera and TLS sensor characteristics that are suitable for the proposed DMS; development of methodology for linear feature extraction and matching from TLS data and images; implementation of linear feature based registration methodology; and computation of 2D/3D deflections.

Stage 2 of the project will select suitable sites for the field implementation of Stage 1 results in collaboration with railroad industry. Based on the field results, the research methodology will be validated and the final report will be made available to the railroad bridge owners for consideration to use it in their regular maintenance.

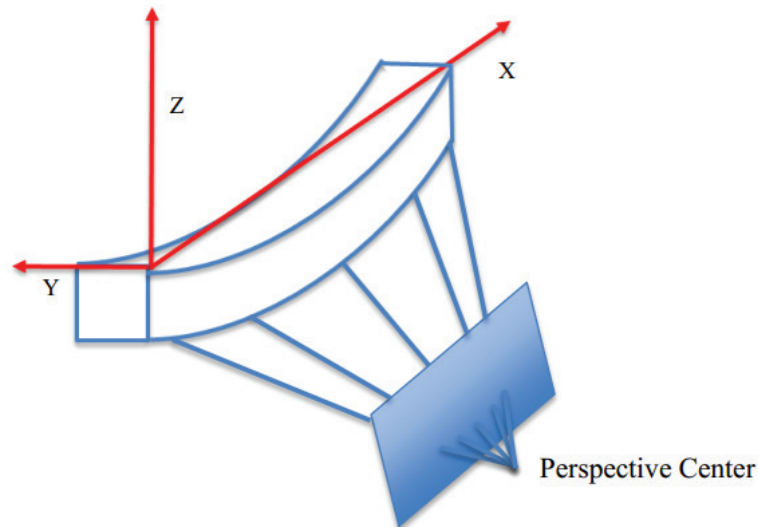


Figure 1. 2D Deflection Measurement from camera.

Product Payoff Potential

New federal regulations from the Federal Railroad Administration (FRA), U.S. Department of Transportation, now mandate North American railroad bridge owners to closely assess the structural capacity of their bridges. Consequently, railroad companies are currently looking into developing and exploring monitoring systems for specific bridges, to aid them improve and develop bridge safety in order to comply with this new rule (FRA 2008). U.S. timber railroad bridges comprise 24% of the total inventory length of 418 miles (FRA 2008). The timber components in bridges have already exceeded their traditionally accepted life span of 50 years in many locations. In the absence of a feasible and convenient means to measure displacements, railroads can hardly justify including displacements and limits as part of the standard bridge management program. The collection of actual displacement data in railroad bridges is rather rare, because of the high mobilization cost associated with installing a reference point by the bridge. This project is expected to assist the railroad bridge owners to come up with an economical and safe method that will be useful for timber railroad bridge deflection monitoring.

Product Transfer

The implementation of the project will be performed in CSX-owned railroad bridges and derived deflection values from the proposed approach will be compared with their maintenance procedures for feedback and improvement. After successful completion of the project, a series of free webinars will be offered to railroad structural engineering community to transfer the knowledge. In addition, prototype software and best practices procedure that will result from successful completion of this project will be shared with all railroad agencies to identify their railroad bridges that need repair or reconstruction based on their 2D/3D beam deflections.

The National Academies of
SCIENCES • ENGINEERING • MEDICINE

The nation turns to the National Academies
of Sciences, Engineering, and Medicine for
independent, objective advice on issues that
affect people's lives worldwide.

www.national-academies.org